


WARREN RUPP®

Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified

IDEX
FLUID & METERING

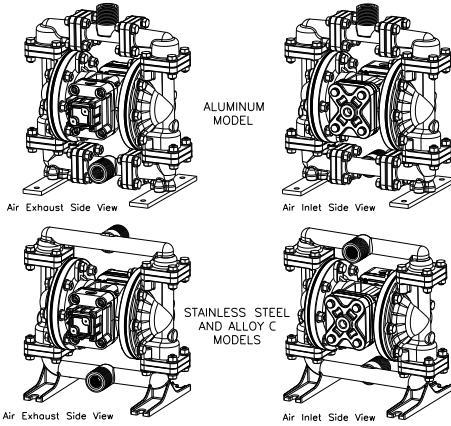

SANDPIPER®

A WARREN RUPP PUMP BRAND

**S05 Metallic
Design Level 1
Ball Valve**

**Air-Operated
Double Diaphragm Pump**

ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA




For ATEX ratings
see pages 2, 7 & 8

INTAKE/DISCHARGE PIPE SIZE	CAPACITY	AIR VALVE	SOLIDS-HANDLING	HEADS UP TO	DISPLACEMENT/STROKE
½" NPT or ½" BSP Tapered (internal) 1" NPT or 1" BSP Tapered (external)	0 to 15 gallons per minute (0 to 56 liters per minute)	No-lube, no-stall design	Up to .125 in. (3mm)	125 psi or 289 ft. of water (8.6 bar or 86 meters)	.026 Gallon / .098 liter

MODEL S05 Metallic Performance Curve

Performance based on the following: elastomer fitted pump, flooded suction, water at ambient conditions.
The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

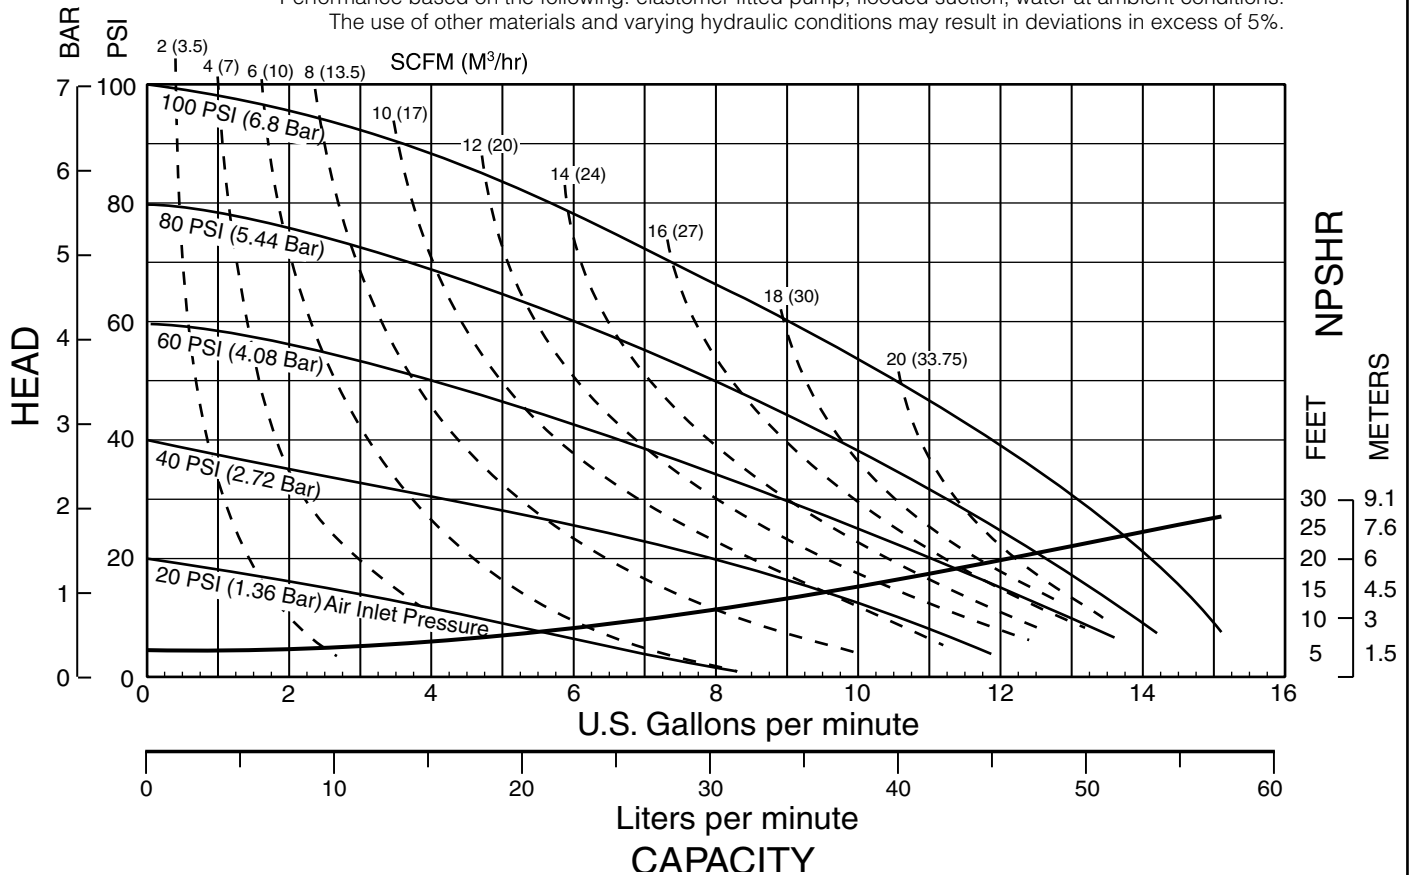

SANDPIPER® pumps are designed to be powered only by compressed air.

USA

Explanation of Pump Nomenclature, S05 Metallic · Design Level 1· Ball Valve

MODEL	Pump Brand	Pump Size	Check Valve Type	Design Level	Wetted Material	Diaphragm/Check Valve Materials	Check Valve Seat	Non-Wetted Material Options	Porting Options	Pump Style	Pump Options	Shipping Kit Options	Weight lbs. (kg)
S05B1ACTPANS000.	S	05	B	1	A	C	T	A	N	S	0	00.	15 (7)
S05B1A1WANS000.	S	05	B	1	A	1	W	A	N	S	0	00.	15 (7)
S05B1A2TANS000.	S	05	B	1	A	2	T	A	N	S	0	00.	15 (7)
S05B1SBWANS000.	S	05	B	1	S	B	W	A	N	S	0	00.	21 (10)
S05B1HNWANS000.	S	05	B	1	H	N	W	A	N	S	0	00.	23 (11)
S05B1HZTANS000.	S	05	B	1	H	Z	T	A	N	S	0	00.	23 (11)

Note: Models listed in the table are for reference only. See nomenclature below for other models.

Pump Brand

S= SANDPIPER®

Pump Size

05= 1/2"

Check Valve Type

B= Ball

Design Level

1= Design Level

Wetted Material

A= Aluminum
S= Stainless Steel
H= Alloy C

Diaphragm/Check Ball Material

B= Nitrile/Nitrile
C= FKM/PTFE
N= Neoprene/Neoprene
E= EPDM/EPDM
1= Santoprene/Santoprene
2= PTFE-Santoprene/PTFE
Z= One Piece PTFE-Nitrile/PTFE

Valve Seat

A= Aluminum
C= Cast Iron
H= Alloy C
S= Stainless Steel
T= PTFE
W= UHMW Polyethylene

Non-Wetted Material

A= Aluminum
Y= Aluminum w/ Stainless Steel Hardware
▲ †C= Conductive Polypropylene With Stainless Steel hardware
†P= Polypropylene With Stainless Steel hardware

Porting Options

N= NPT Threads
B= BSP (Tapered) Threads
1= Dual Porting (NPT)
2= Top Dual Porting (NPT)
3= Bottom Dual Porting NPT
4= Dual Porting BSP (Tapered)
5= Top Dual Porting BSP (Tapered)
6= Bottom Dual Porting BSP (Tapered)

Pump Style

S= Standard

Pump Options

0= Integral Muffler
1= Sound Dampening Muffler
2= Mesh Muffler
▲ 6= Metal Muffler
▲ 7= Metal Muffler with Grounding Cable




Kit Options

- ▲ 00.=None
 - P0.=10-30VDC Pulse Output Kit
 - ◇ P1.=Intrinsically-Safe 5-30VDC, 110/120VAC 220/240 VAC Pulse Output Kit
 - P2.=110/120 or 220/240VAC Pulse Output Kit
 - E0.=Solenoid Kit with 24VDC Coil
 - ▲ E1.=Solenoid Kit with 24VDC Explosion-Proof Coil
 - E2.=Solenoid Kit with 24VAC/12VDC Coil
 - ▲ E3.=Solenoid Kit with 12VDC Explosion-Proof Coil
 - E4.=Solenoid Kit with 110VAC Coil
 - ▲ E5.=Solenoid Kit with 110VAC Explosion-Proof Coil
 - E6.=Solenoid Kit with 220VAC Coil
 - ▲ E7.=Solenoid Kit with 220VAC Explosion-Proof Coil
 - ▲ E8.=Solenoid Kit with 110VAC, 50 Hz Explosion-Proof Coil
 - ▲ E9.= Solenoid Kit with 230VAC, 50 Hz Explosion-Proof Coil
 - SP.= Stroke Indicator Pins
-
- ◆ A1.=Solenoid Kit with 12 VDC ATEX Compliant Coil
 - ◆ A2.=Solenoid Kit with 24 VDC ATEX Compliant Coil
 - ◆ A3.=Solenoid Kit with 110/120 VAC 50/60 Hz ATEX Compliant Coil
 - ◆ A4.=Solenoid Kit with 220/240 VAC 50/60 Hz ATEX Compliant Coil




† Note: Pumps equipped with non-wetted options C or P are limited to a maximum operating pressure of 100 psi or 7 bar.

(1)  II 1G c T5
 II 3/1 G c T5
 II 1D c T100°C
 I M1 c
 I M2 c

Models equipped with Wetted Options S or H, Non-Wetted Option C, Pump Options 6 or 7, and Kit Option 0. NOTE: See page 37 for ATEX Explanation of EC-Type Certificate

(3*)  II 2G EEx m c II T5
 II 3/2 2G EEx m c II T5
 II 2D c IP65 T100°C




Note: Pumps ordered with the options listed in (1) to the left are ATEX compliant when ordered with kit option A1, A2, A3, or A4. Compressed Air Temperature Range: Maximum Ambient Temperature to plus 50°C.

 II 2G c T5
 II 3/2 G c T5
 II 2D c T100°C

Models equipped with Wetted Options A,S or H, Non-Wetted Options A or Y, Pump Options 6 or 7, and Kit Option 0. NOTE: See page 37 for ATEX Explanation of Type Examination Certificate

(4)  IEC EEx m T4



(2)  II 2G Ex ia c IIC T5
 II 3/2 G Ex ia c IIC T5
 II 2D Ex c ia 20 IP67 T100°C

Note: Pumps ordered with the options listed in (1) to the left are ATEX compliant when ordered with kit option P1.

Note: Pump models equipped with these explosion-proof solenoid kit options E1, E3, E5, E7, E8 or E9, are certified and approved by the above agencies. They are NOT ATEX compliant.

**CAUTION! Operating temperature limitations are as follows:**

Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.


Materials	Operating Temperatures	
	Maximum	Minimum
Nitrile General purpose, oil-resistant. Shows good solvent, oil, water and hydraulic fluid resistance. Should not be used with highly polar solvents like acetone and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons.	190°F 88°C	-10°F -23°C
EPDM Shows very good water and chemical resistance. Has poor resistance to oil and solvents, but is fair in ketones and alcohols.	280°F 138°C	-40°F -40°C
NEOPRENE All purpose. Resistant to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters, nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C
PTFE Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C
FKM (Fluorocarbon) shows good resistance to a wide range of oils and solvents; especially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or hot aqueous solutions (over 70°F) will attack FKM.	350°F 177°C	-40°F -40°C
Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
Polypropylene A thermoplastic polymer. Moderate tensile and flex strength. Resists strong acids and alkalis. Attacked by chlorine, fuming nitric acid and other strong oxidizing agents.	180°F 82°C	32°F 0°C
Conductive HDPE	180°F 82°C	-35°F -37°C
UHMW PE A thermoplastic polymer that is highly resistant to a broad range of chemicals. Exhibits outstanding abrasion and impact resistance, along with environmental stress-cracking resistance.	180°F 82°C	-35°F -37°C

For specific applications, always consult "Chemical Resistance Chart" Technical Bulletin

Dimensions: S05 Metallic (Aluminum Model)


Dimensions in Inches

Dimensional Tolerance: $\pm 1/8$ "

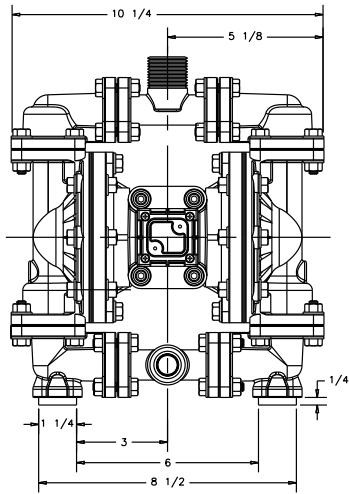


FRONT VIEW

ENCAPSULATED MUFFLER:
3/8" NPT EXHAUST PORT
FOR OPTIONAL PIPING MUFFLER
STYLES OR PIPING EXHAUST
AIR IN SUBMERGED
APPLICATIONS.

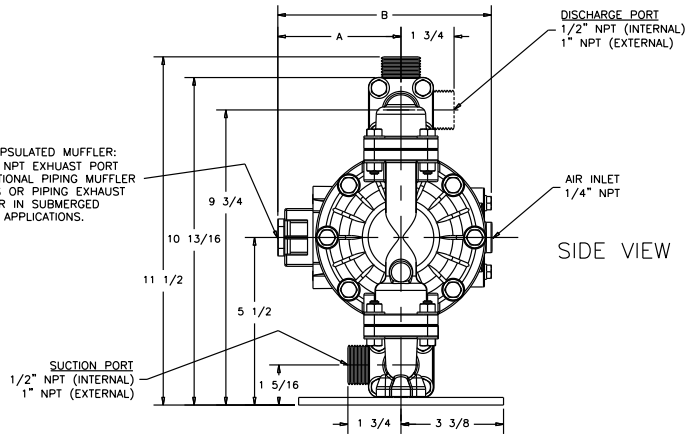

SIDE VIEW

BOTH SUCTION AND DISCHARGE
PORTS ARE AVAILABLE IN
1/2" BSP TAPERED (INTERNAL)
1" BSP TAPERED (EXTERNAL)

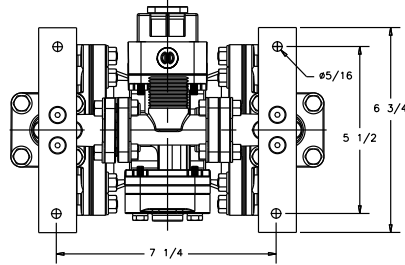


BOTTOM VIEW

DIMENSION	A	B
Integral Muffler	4 5/16"	7 5/16"
Pulse Output Kit	4 5/16"	7 5/16"
Mesh Muffler	6"	9"
Metal Muffler	5 5/8"	8 5/8"


Dimensions in Millimeters

Dimensional Tolerance: ± 3 mm

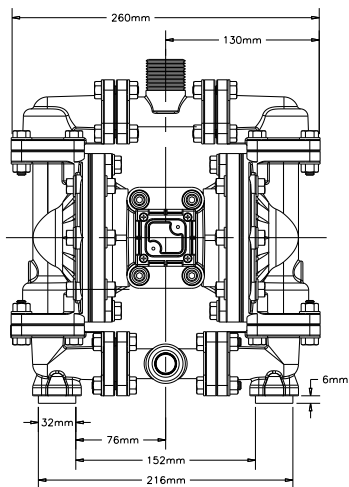


FRONT VIEW

ENCAPSULATED MUFFLER:
3/8" NPT EXHAUST PORT
FOR OPTIONAL PIPING MUFFLER
STYLES OR PIPING EXHAUST
AIR IN SUBMERGED
APPLICATIONS.

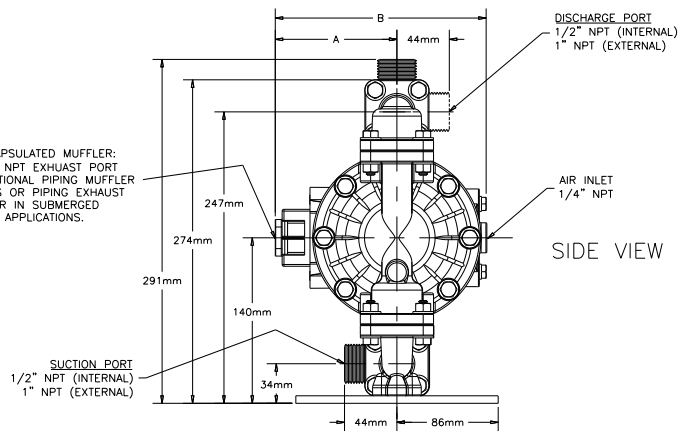

SIDE VIEW

BOTH SUCTION AND DISCHARGE
PORTS ARE AVAILABLE IN
1/2" BSP TAPERED (INTERNAL)
1" BSP TAPERED (EXTERNAL)

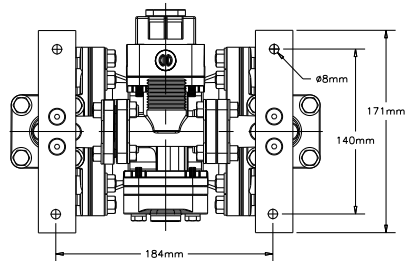


BOTTOM VIEW

DIMENSION	A	B
Integral Muffler	109mm	186mm
Pulse Output Kit	109mm	186mm
Mesh Muffler	152mm	229mm
Sound Dampening Muffler	152mm	229mm
Metal Muffler	143mm	219mm


Dimensions: S05 Metallic (Stainless Steel & Alloy C Models)

Dimensions in Inches


Dimensional Tolerance: $\pm 1/8$ "

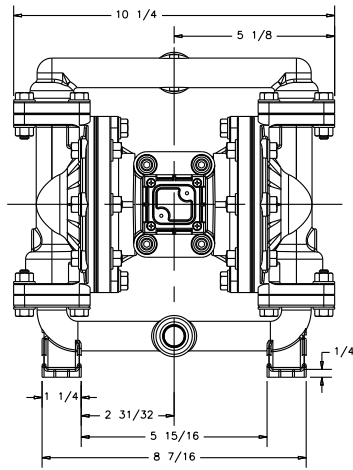

FRONT VIEW

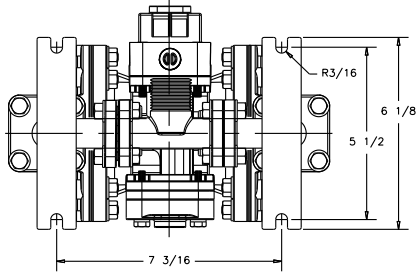

BOTTOM VIEW

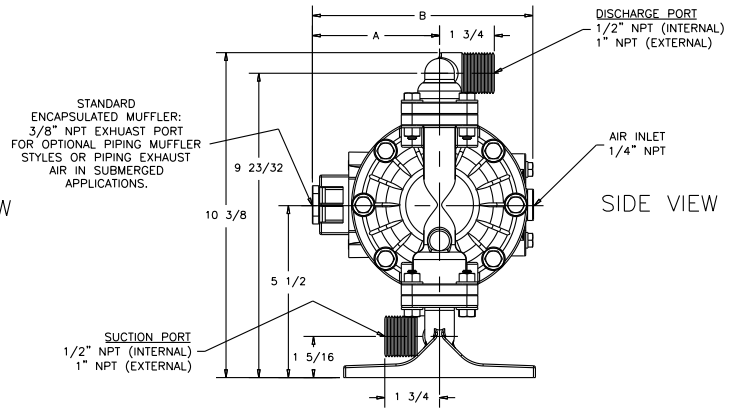


SIDE VIEW

BOTH SUCTION AND DISCHARGE PORTS ARE AVAILABLE IN 1/2" BSP TAPERED (INTERNAL) 1" BSP TAPERED (EXTERNAL)


DIMENSION	A	B
Integral Muffler	4 5/16"	7 5/16"
Pulse Output Kit	4 5/16"	7 5/16"
Mesh Muffler	6"	9"
Sound Dampening Muffler	6"	9"
Metal Muffler	3 7/16"	6 7/16"

Dimensions in Millimeters


Dimensional Tolerance: ± 3 mm

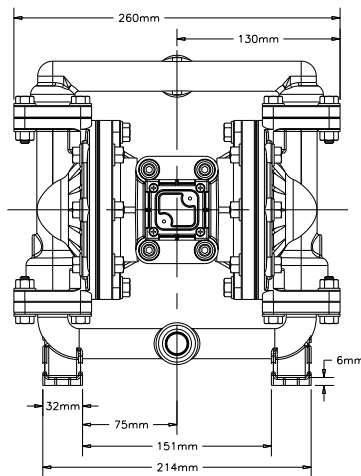

FRONT VIEW

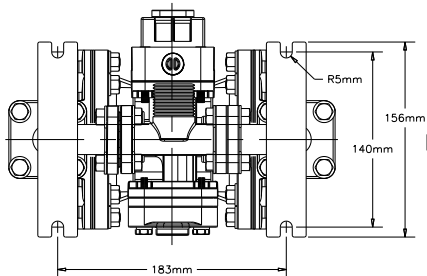

BOTTOM VIEW

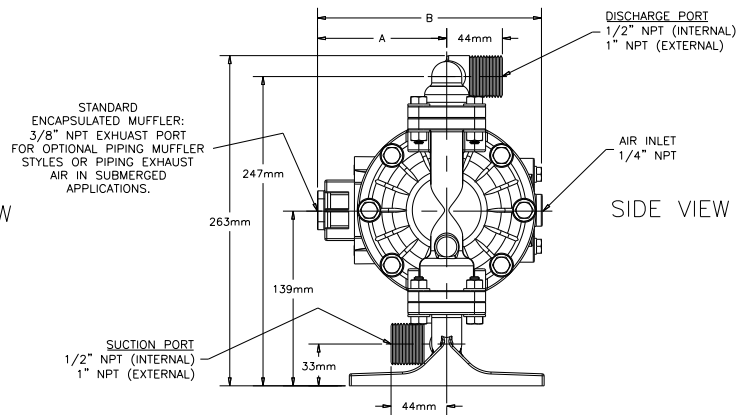

SIDE VIEW

BOTH SUCTION AND DISCHARGE PORTS ARE AVAILABLE IN 1/2" BSP TAPERED (INTERNAL) 1" BSP TAPERED (EXTERNAL)

DIMENSION	A	B
Integral Muffler	109mm	186mm
Pulse Output Kit	109mm	186mm
Mesh Muffler	152mm	229mm
Sound Damening Muffler	152mm	229mm
Metal Muffler	143mm	219mm

**WARREN
RUPP, INC.®**

Declaration of Conformity

Manufacturer:

**Warren Rupp, Inc.®, 800 N. Main Street, P.O. Box 1568,
Mansfield, Ohio, 44901-1568 USA**

certifies that Air-Operated Double Diaphragm Pump Series: HDB, HDF, M Non-Metallic, S Non-Metallic, M Metallic, S Metallic, T Series, G Series, RS Series U Series, EH and SH High Pressure, W Series, SMA and SPA Submersibles, and Tranquilizer Surge Suppressors comply with the European Community Directive 2006/42/EC on Machinery, according to Annex VIII. This product has used Harmonized Standard EN 809, Pumps and Pump Units for Liquids - Common Safety Requirements, to verify conformance.

David Roseberry
Signature of authorized person

October 20, 2005
Date of issue

David Roseberry
Printed name of authorized person

Engineering Manager
Title

Revision Level: E

MAY 27, 2010
Date of revision

IDEX
FLUID & METERING



Declaration of Conformity

Declaration of Conformity

WARREN RUPP, INC.[®]

EC Declaration of Conformity

In accordance with ATEX Directive 94/9/EC,
Equipment intended for use in potentially explosive environments.

Manufacturer:

Warren Rupp, Inc.[®]
A Unit of IDEX Corporation
800 North Main Street
P.O. Box 1568
Mansfield, OH 44901-1568 USA

Applicable Standard:

EN13463-1: 2001,
EN13463-5: 2003



EN 60079-25: 2004

For pumps equipped with Pulse Output ATEX Option
KEMA Quality B.V. (0344)

AODD Pumps and Surge Suppressors

For Type Examination Designations, see page 2 (back)

AODD (Air-Operated Double Diaphragm) Pumps

EC Type Examination Certificate No. Pumps: KEMA 09ATEX0071 X

KEMA Quality B.V.
Utrechtseweg 310
6812 AR Arnhem, The Netherlands

SANDPIPER[®]
A WARREN RUPP, INC. BRAND

Tranquilizer[®]

DATE/APPROVAL/TITLE:
27 MAY 2010


David Roseberry
David Roseberry, Engineering Manager

IDEX
FLUID & METERING

WARREN RUPP, INC.®

EC Declaration of Conformity

ATEX Summary of Markings

Type		Marking	Listed In	Non-Conductive Fluids	
Pump types, S1F, S15, S20, and S30 provided with the pulse output option		II 2 G Ex ia c IIC T5 II 3/2 G Ex ia c IIC T5 II 2 D Ex c iaD 20 IP67 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X	No Yes Yes
Pump types, S1F, S15, S20, and S30 provided with the integral solenoid option		II 2 G EEx m c II T5 II 3/2 G EEx m c II T5 II 2 D c IP65 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X	No Yes Yes
Pump types, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, ST1½, ST40, G15, G20, and G30, without the above listed options, no aluminum parts		II 1 G c T5 II 3/1 G c T5 II 1 D c T100°C I M1 c I M2 c	KEMA 09ATEX0071 X KEMA 09ATEX0072 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0072 X	No Yes Yes No Yes
Pump types, DMF2, DMF3, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, SE½, ST1, ST25, ST1½, ST40, U1F, G05, G1F, G15, G20, and G30		II 2 G c T5 II 3/2 G c T5 II 2 D c T100°C	KEMA 09ATEX0072 X CE	KEMA 09ATEX0072 X KEMA 09ATEX0072 X KEMA 09ATEX0072 X	No Yes Yes
Surge Suppressors all types		II 2 G T5 II 3/2 G T5 II 2 D T100°C	KEMA 09ATEX0073 CE	KEMA 09ATEX0073 KEMA 09ATEX0073 KEMA 09ATEX0073	No Yes Yes

EC Type Certificate No. Pumps: KEMA 09ATEX0071 X
 Type Certificate No. Pumps: KEMA 09ATEX0072 X
 Type Certificate No. Suppressors: KEMA 09ATEX0073