

**WARREN
RUPP®**

SANDPIPER®
A WARREN RUPP PUMP BRAND



Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified




See pages 2, 7 & 8
for ATEX ratings.

IDEX
FLUID & METERING

S15
Non-Metallic Ball Valve
Design Level 3
Air-Operated
Double Diaphragm Pump

ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA

INTAKE/DISCHARGE PIPE SIZE	CAPACITY	AIR VALVE	SOLIDS-HANDLING	HEADS UP TO	DISPLACEMENT/STROKE
1½" ANSI Flange or PN10 40mm DIN Flange	0 to 100 gallons per minute (0 to 378 liters per minute)	No-lube, no-stall design	Up to .47 in. (12mm)	100 psi or 231 ft. of water (7 bar or 70 meters)	.43 Gallon / 1.63 liter

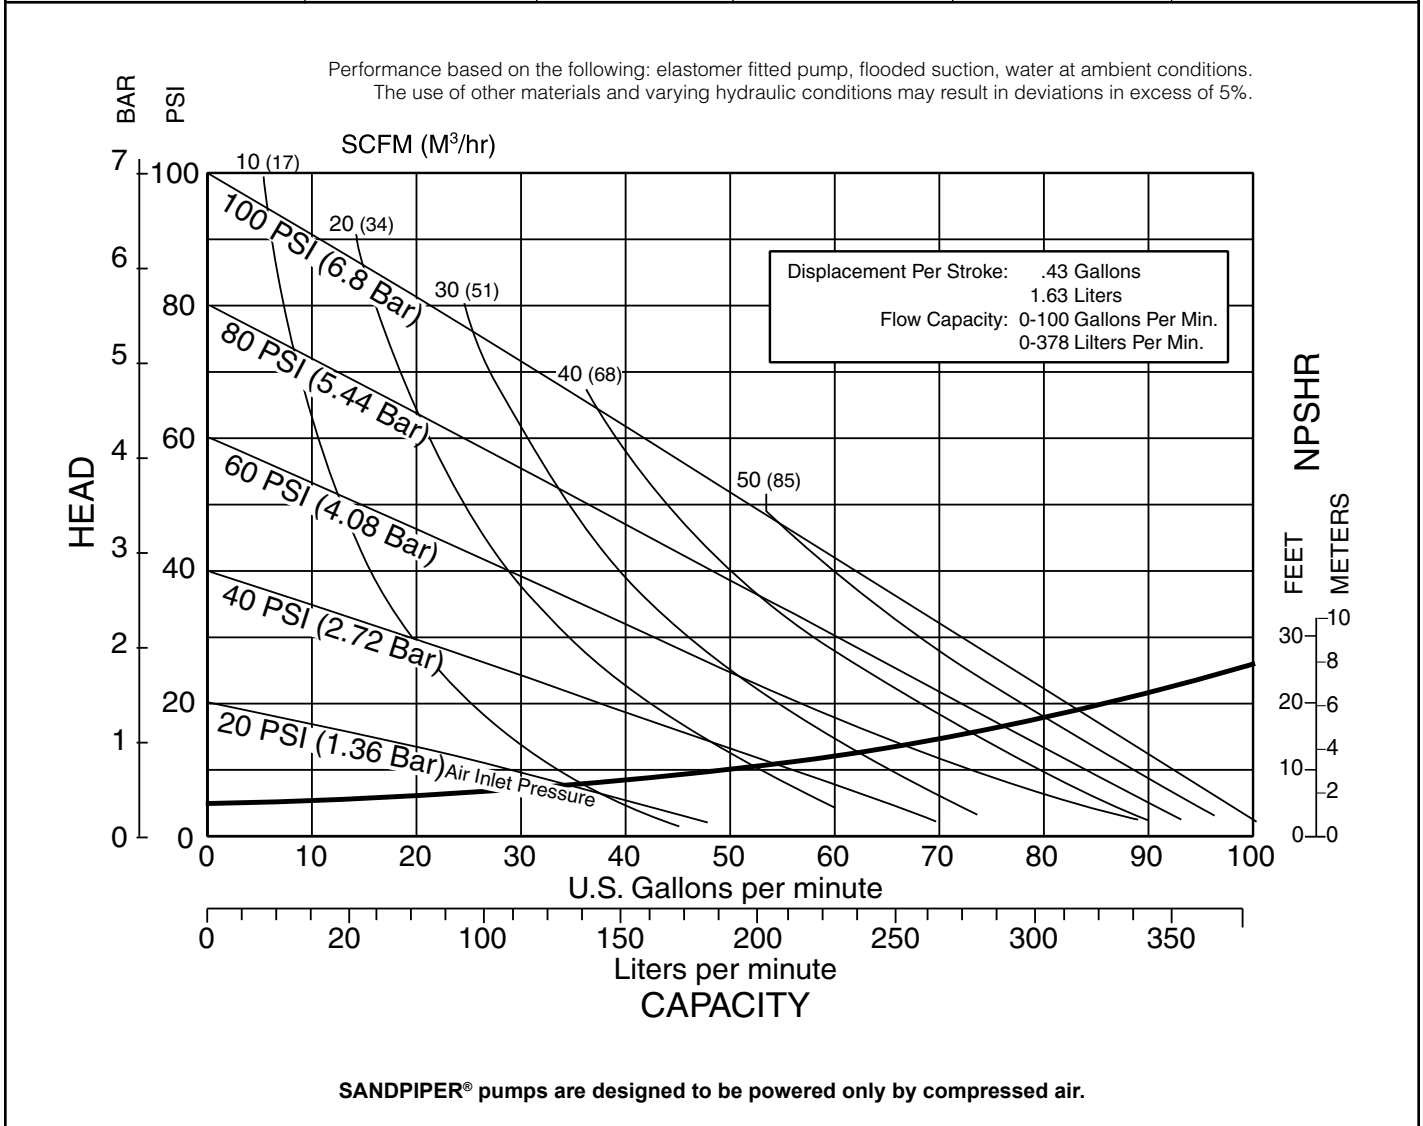

Explanation of Pump Nomenclature

S15 Non-Metallic • Design Level 3 • Ball Valve

Model	Pump Brand	Pump Size	Check Valve Type	Design Level	Wetted Material	Diaphragm/Check Valve Materials	Check Valve Seat	Non-Wetted Material Options	Porting Options	Pump Style	Pump Options	Shipping Kit Options	Weight lbs. (kg)
S15B3P1PPAS000.	S	15	B	3	P	1	P	P	A	S	0	00.	80 (36)
S15B3K1KPAS000.	S	15	B	3	K	1	K	P	A	S	0	00.	108 (49)
S15B3P2PPAS000.	S	15	B	3	P	2	P	P	A	S	0	00.	83 (34)
S15B3PGPPAS000.	S	15	B	3	P	G	P	P	A	S	0	00	109 (50)
S15B3KKGKAS000.	S	15	B	3	K	G	K	P	A	S	0	00	112 (51)
S15B3C1PCAS000.	S	15	B	3	C	1	P	C	A	S	0	00.	84 (38)

Note: Models listed in the table are for reference only. See nomenclature below for other models.

Pump Brand

S= SANDPIPER®

Pump Size

15=1½"

Check Valve Type

B= Ball

Design Level

3= Design Level 3

Wetted Material

K= PVDF

P= Polypropylene

⚠ C=Conductive Polypropylene

Diaphragm / Check Valve Materials

1= Santoprene/Santoprene

2= PTFE-Santoprene Backup/PTFE

6= PTFE Pumping, PTFE-Neoprene Backup Driver/PTFE

B= Nitrile/Nitrile

C=FKM/PTFE

G=PTFE-Neoprene Backup/PTFE

N=Neoprene/Neoprene

U=Urethane/Urethane

Z= One-Piece Bonded/PTFE

Check Valve Seat

K= PVDF

P= Polypropylene

Non-Wetted Material Options

⚠ C=Carbon Filled Conductive

Polypropylene

P= 40%Glass Filled Polypropylene

1= 40%Glass Filled Polypropylene

w/PTFE Coated Hardware

Porting Options

A= ANSI Flange

D= DIN Flange

7= Dual Porting (ANSI)

8= Top Dual Porting (ANSI)

9= Bottom Dual Porting (ANSI)

Pump Style

D= with Electronic Leak Detection (110V)

E= with Electronic Leak Detection (220V)

M=with Mechanical Leak Detection

S= Standard

V= with Visual Leak Detection

Pump Options

⚠ 0= None

1= Sound Dampening Muffler

2= Mesh Muffler

3= High temperature Air Valve

w/Integral Muffler

4= High temperature Air Valve

w/Sound Dampening Muffler

5= High temperature Air Valve

w/Mesh Muffler

⚠ 6= Metal Muffler

⚠ 7= Metal Muffler w/ Grounding Cable

Kit Options

⚠ 00.=None

P0.=10-30VDC Pulse Output Kit

◇ P1.=Intrinsically-Safe 5-30VDC, 110/120VAC 220/240 VAC Pulse Output Kit

P2.=110/120 or 220/240VAC

Pulse Output Kit

△ E0.=Solenoid Kit with 24VDC Coil

△ E1.=Solenoid Kit with 24VDC

Explosion-Proof Coil

E2.=Solenoid Kit with

24VAC/12VDC Coil

△ E3.=Solenoid Kit with 12VDC

Explosion-Proof Coil

△ E4.=Solenoid Kit with 110VAC Coil

△ E5.=Solenoid Kit with 110VAC

Explosion-Proof Coil

△ E6.=Solenoid Kit with 220VAC Coil

△ E7.=Solenoid Kit with 220VAC

Explosion-Proof Coil

△ E8.=Solenoid Kit with

110VAC, 50 Hz

Explosion-Proof Coil

△ E9.= Solenoid Kit with

230VAC, 50 Hz

Explosion-Proof Coil

SP.= Stroke Indicator Pins

◆ A1.=Solenoid Kit with 12 VDC

ATEX Compliant Coil

◆ A2.=Solenoid Kit with 24 VDC

ATEX Compliant Coil

◆ A3.=Solenoid Kit with 110/120 VAC


50/60 Hz ATEX Compliant Coil

◆ A4.=Solenoid Kit with 220/240 VAC


50/60 Hz ATEX Compliant Coil

(1)  II 1G c T5
II 3/1 G c T5
II 1D c T100°C
I M1 c
I M2 c

⚠ Note: Pumps are only ATEX compliant when ordered with wetted material option C, non-wetted material option C, pump option 0, 6 or 7, and kit option 0.

(3*)  II 2G EEx m c II T5
II 3/2 2G EEx m c II T5
II 2D c IP65 T100°C

◆ Note: Pumps ordered with the options listed in (1) to the left are ATEX compliant when ordered with kit option A1, A2, A3, or A4. Compressed Air Temperature Range: Maximum Ambient Temperature to plus 50°C.

(2)  II 2G Ex ia c IIC T5
II 3/2 G Ex ia c IIC T5
II 2D Ex c ia 20 IP67 T100°C

◇ Note: Pumps ordered with the options listed in (1) to the left are ATEX compliant when ordered with kit option P1.

(4)  IEC EEx m T4

△ Note: Pump models equipped with these explosion-proof solenoid kit options E1, E3, E5, E7, E8 or E9, are certified and approved by the above agencies. They are NOT ATEX compliant.



CAUTION! Operating temperature limitations are as follows:

Maximum and Minimum Temperatures are the limits for which these materials can be operated. Temperatures coupled with pressure affect the longevity of diaphragm pump components. Maximum life should not be expected at the extreme limits of the temperature ranges.


Materials	Operating Temperatures	
	Maximum	Minimum
PVDF A durable fluoroplastic with excellent chemical resistance. Excellent for UV applications. High tensile strength and impact resistance.	250°F 121°C	0°F -18°C
NEOPRENE All purpose. Resistant to vegetable oils. Generally not affected by moderate chemicals, fats, greases and many oils and solvents. Generally attacked by strong oxidizing acids, ketones, esters, nitro hydrocarbons and chlorinated aromatic hydrocarbons.	200°F 93°C	-10°F -23°C
PTFE Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	220°F 104°C	-35°F -37°C
FKM (Fluorocarbon) shows good resistance to a wide range of oils and solvents; especially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or hot aqueous solutions (over 70°F) will attack FKM.	350°F 177°C	-40°F -40°C
Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	275°F 135°C	-40°F -40°C
Polypropylene A thermoplastic polymer. Moderate tensile and flex strength. Resists strong acids and alkalis. Attacked by chlorine, fuming nitric acid and other strong oxidizing agents.	180°F 82°C	32°F 0°C
Urethane Shows good resistance to abrasives. Has poor resistance to most solvents and oils.	150°F 66°C	32°F 0°C

For specific applications, always consult the Warren Rupp "Chemical Resistance Chart"

CAUTION: Nonmetallic pumps and plastic components are not UV stabilized. Ultraviolet radiation can damage these parts and negatively affect material properties. Do not expose to UV light for extended periods of time.


Dimensions: S15 Non-Metallic

Dimensions in Inches [] in Millimeters
 Dimensional tolerance: +/- 1/8" [] +/- 3mm

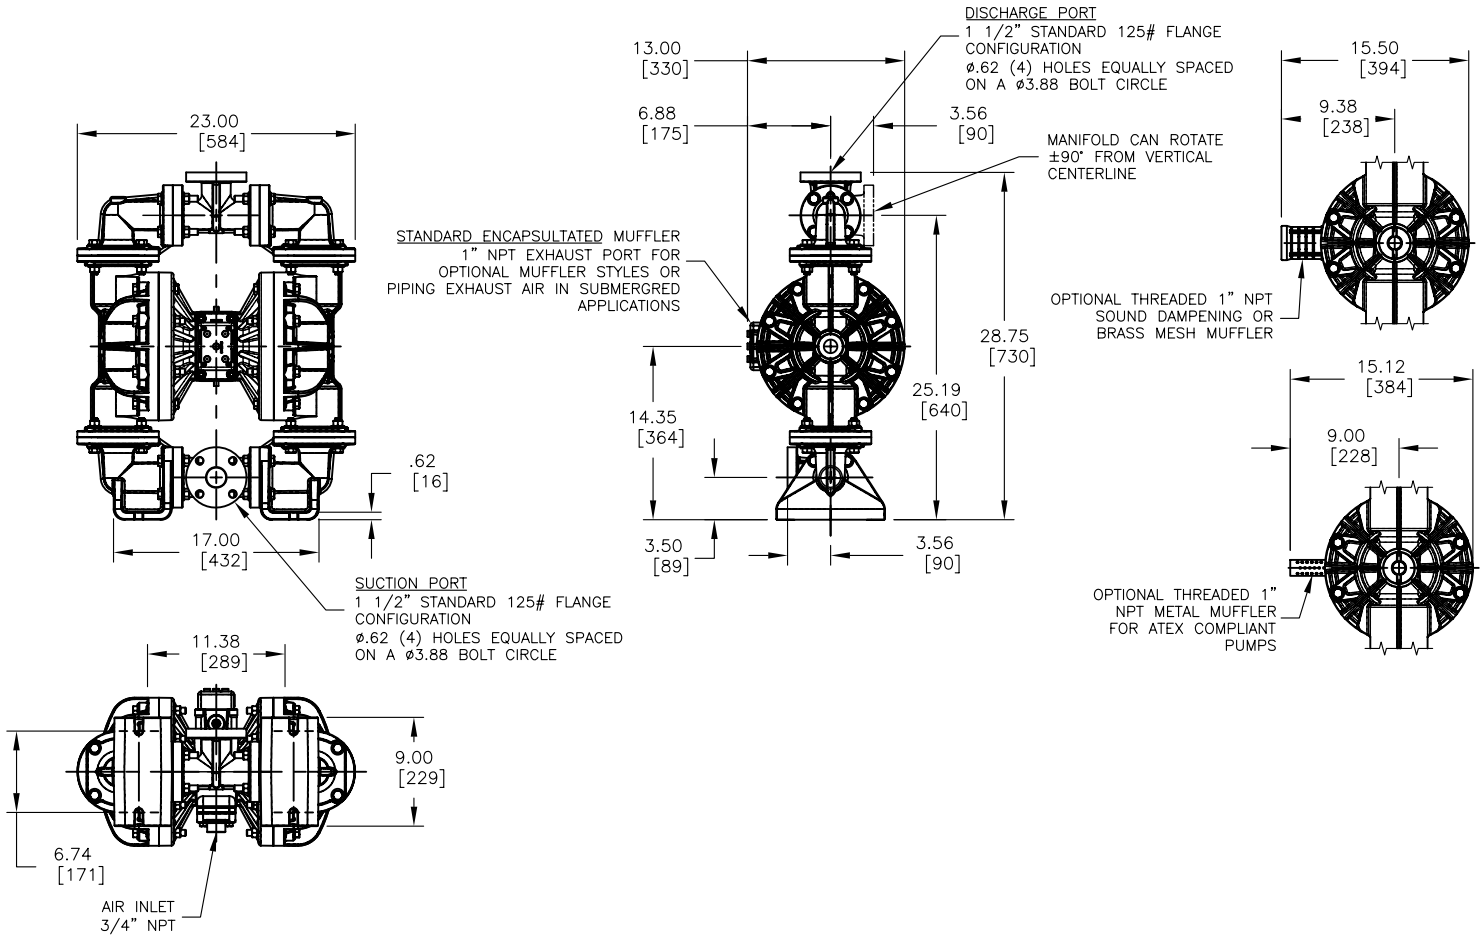

Note: Porting Flanges are also available with PN10 40mm DIN bolting configuration.

Dimensions: S15 Non-Metallic with Spill Containment

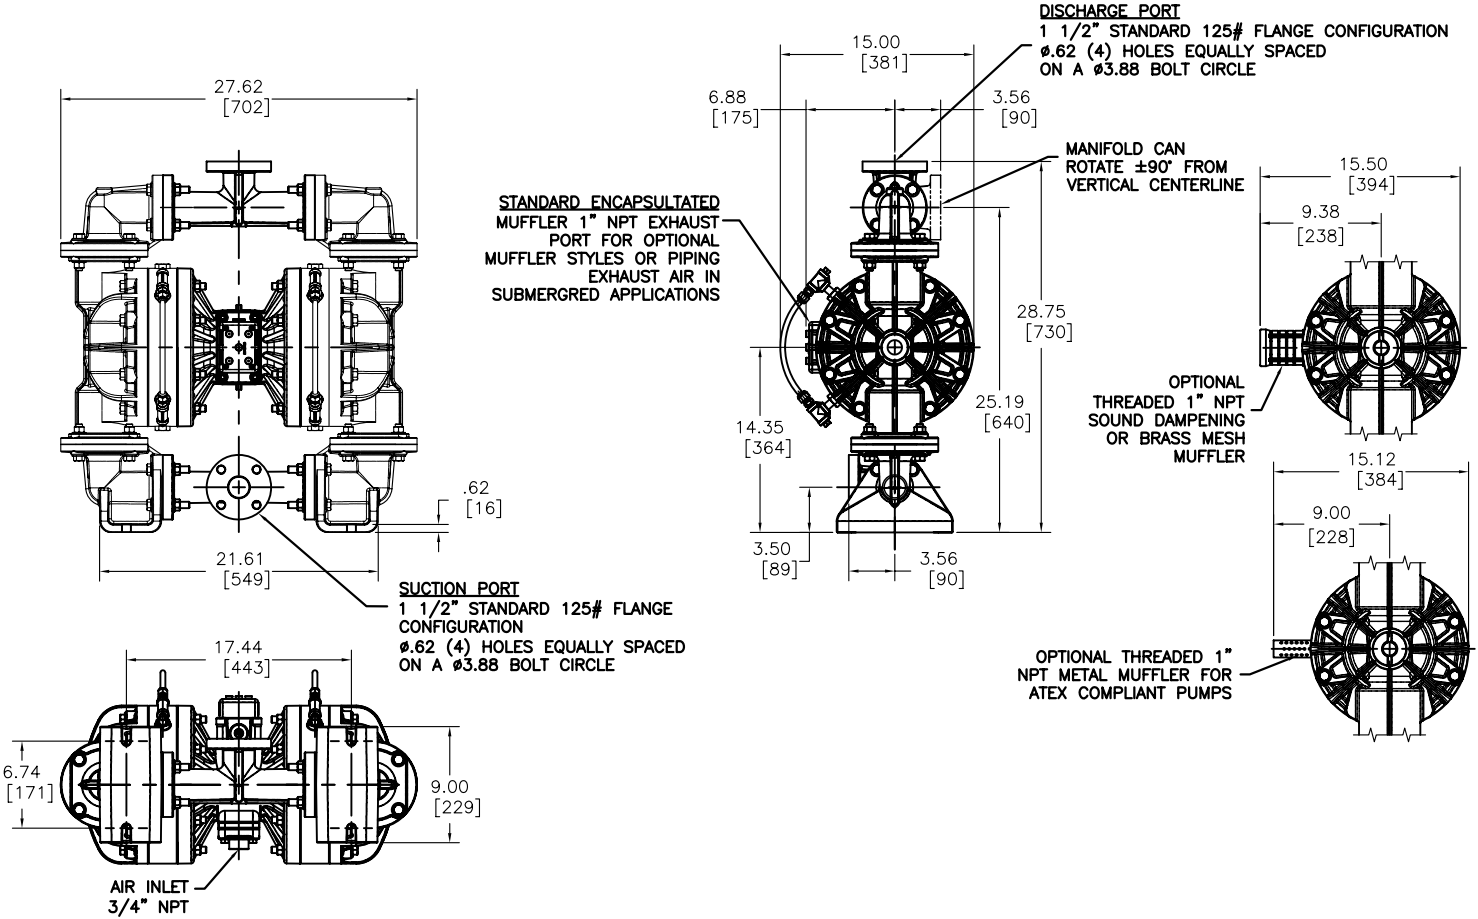

Note: Porting Flanges are also available with PN10 40mm DIN bolting configuration.

Declaration of Conformity

Declaration of Conformity

WARREN RUPP®

Declaration of Conformity

Manufacturer:

**Warren Rupp, Inc.®, 800 N. Main Street, P.O. Box 1568,
Mansfield, Ohio, 44901-1568 USA**

certifies that Air-Operated Double Diaphragm Pump Series: HDB, HDF, M Non-Metallic, S Non-Metallic, M Metallic, S Metallic, T Series, G Series, RS Series U Series, EH and SH High Pressure, W Series, SMA and SPA Submersibles, and Tranquilizer Surge Suppressors comply with the European Community Directive 2006/42/EC on Machinery, according to Annex VIII. This product has used Harmonized Standard EN 809, Pumps and Pump Units for Liquids - Common Safety Requirements, to verify conformance.

David Roseberry
Signature of authorized person

October 20, 2005
Date of issue

David Roseberry
Printed name of authorized person

Engineering Manager
Title

Revision Level: E

MAY 27, 2010
Date of revision



WARREN RUPP®

EC Declaration of Conformity

In accordance with ATEX Directive 94/9/EC,
Equipment intended for use in potentially explosive environments.

Manufacturer:

Warren Rupp, Inc.®
A Unit of IDEX Corporation
800 North Main Street
P.O. Box 1568
Mansfield, OH 44901-1568 USA

Applicable Standard:

EN13463-1: 2001,
EN13463-5: 2003



EN 60079-25: 2004

For pumps equipped with Pulse Output ATEX Option
KEMA Quality B.V. (0344)

AODD Pumps and Surge Suppressors

For Type Examination Designations, see page 2 (back)

AODD (Air-Operated Double Diaphragm) Pumps

EC Type Examination Certificate No. Pumps: KEMA 09ATEX0071 X

KEMA Quality B.V.
Utrechtseweg 310
6812 AR Arnhem, The Netherlands

SANDPIPER®
A WARREN RUPP PUMP BRAND

Tranquilizer®

DATE/APPROVAL/TITLE:
27 MAY 2010


David Roseberry
David Roseberry, Engineering Manager

IDEX
FLUID & METERING

WARREN RUPP®

EC Declaration of Conformity

ATEX Summary of Markings

Type		Marking	Listed In	Non-Conductive Fluids	
Pump types, S1F, S15, S20, and S30 provided with the pulse output option		II 2 G Ex ia c IIC T5 II 3/2 G Ex ia c IIC T5 II 2 D Ex c iaD 20 IP67 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X	No Yes Yes
Pump types, S1F, S15, S20, and S30 provided with the integral solenoid option		II 2 G EEx m c II T5 II 3/2 G EEx m c II T5 II 2 D c IP65 T100°C	KEMA 09ATEX0071 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X	No Yes Yes
Pump types, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, ST1½, ST40, G15, G20, and G30, without the above listed options, no aluminum parts		II 1 G c T5 II 3/1 G c T5 II 1 D c T100°C I M1 c I M2 c	KEMA 09ATEX0071 X KEMA 09ATEX0072 X CE 0344	KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0071 X KEMA 09ATEX0072 X	No Yes Yes No Yes
Pump types, DMF2, DMF3, HDB1½, HDB40, HDB2, HDB50, HDB3, HDF1, HDF25, HDF2, HDF3M, PB¼, S05, S1F, S15, S20, S30, SB1, SB25, SE½, ST1, ST25, ST1½, ST40, U1F, G05, G1F, G15, G20, and G30		II 2 G c T5 II 3/2 G c T5 II 2 D c T100°C	KEMA 09ATEX0072 X CE	KEMA 09ATEX0072 X KEMA 09ATEX0072 X KEMA 09ATEX0072 X	No Yes Yes
Surge Suppressors all types		II 2 G T5 II 3/2 G T5 II 2 D T100°C	KEMA 09ATEX0073 CE	KEMA 09ATEX0073 KEMA 09ATEX0073 KEMA 09ATEX0073	No Yes Yes

EC Type Certificate No. Pumps: KEMA 09ATEX0071 X
 Type Certificate No. Pumps: KEMA 09ATEX0072 X
 Type Certificate No. Suppressors: KEMA 09ATEX0073