


FLOW RANGE: 3 -10 GPM

OUTLET SIZE: 1" NPT

NOMINAL DIA. 4"

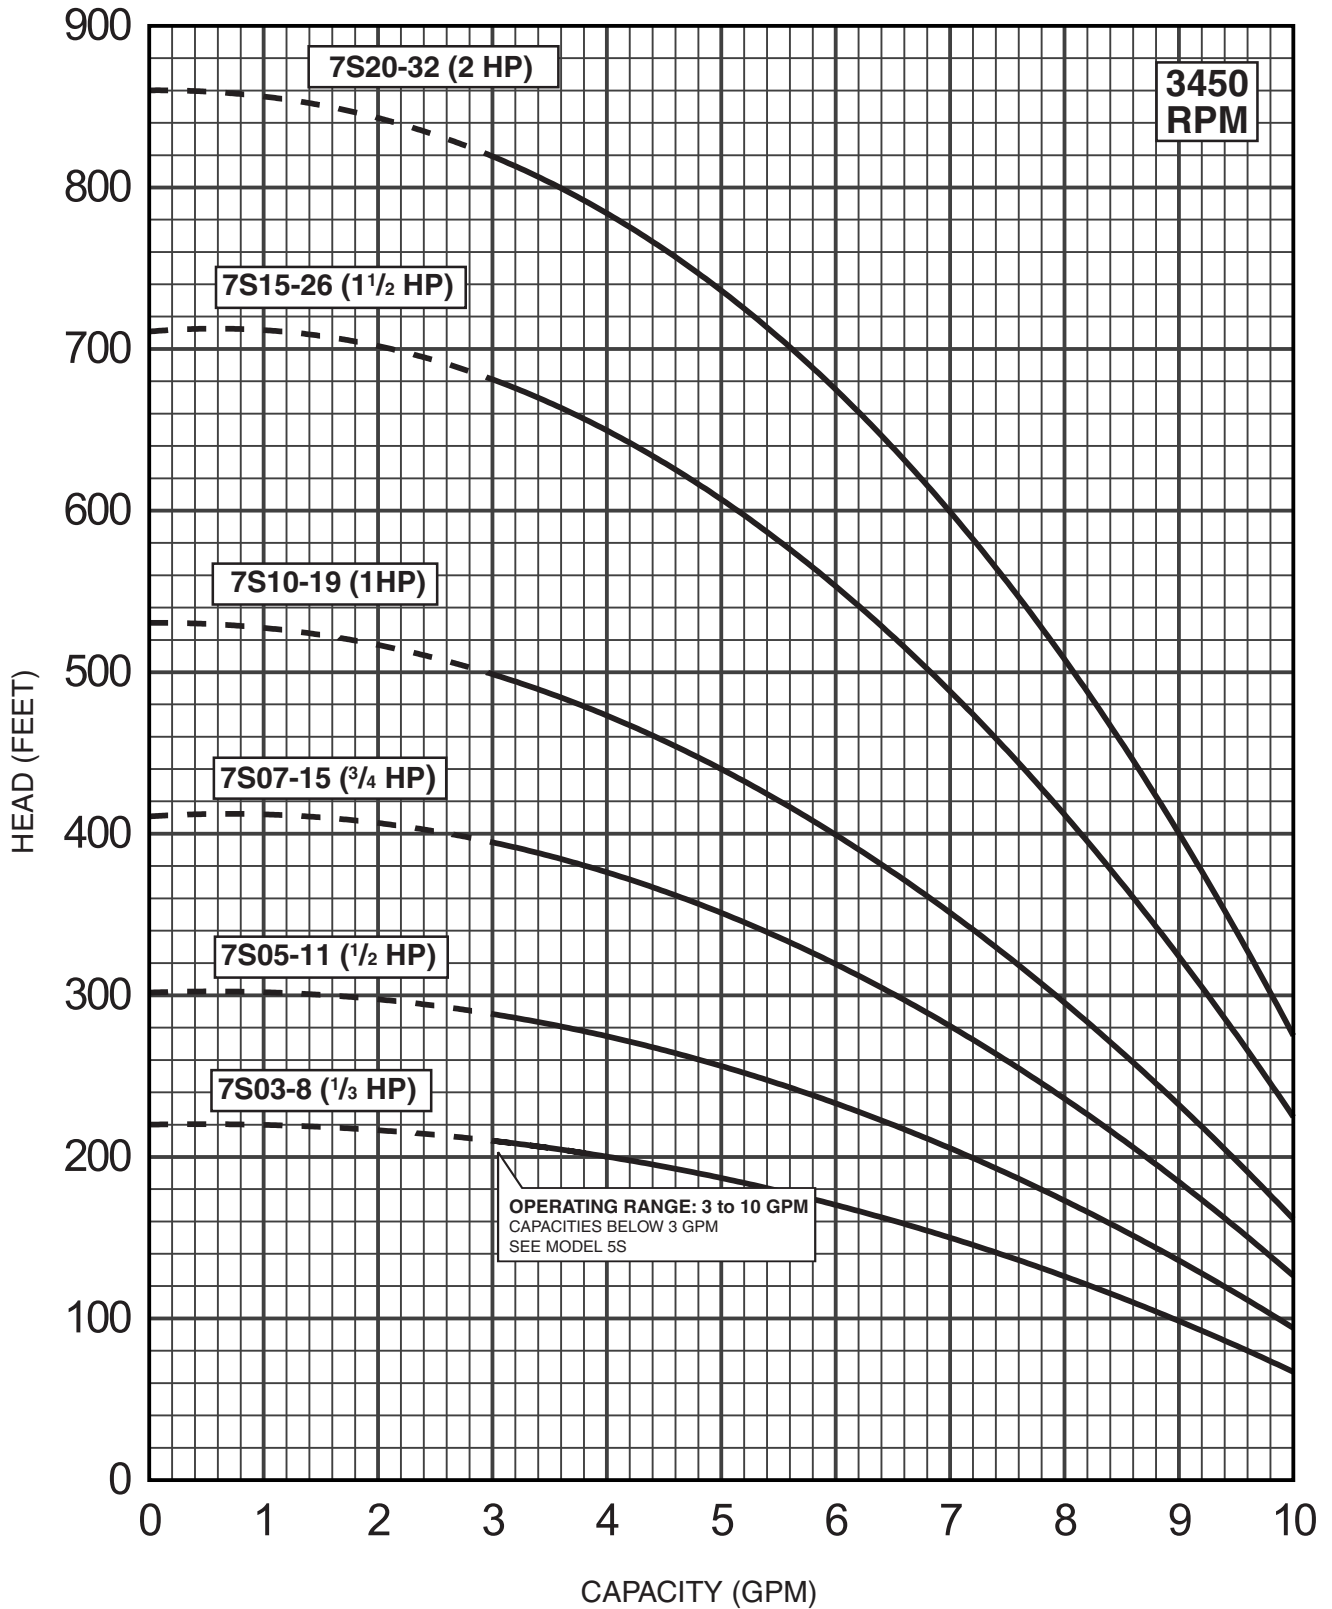

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
4" MOTOR STANDARD, 3450 RPM.

Performance conforms to ISO 9906: 1999 (E) Annex A
Minimum submergence is 2 feet.

DIMENSIONS AND WEIGHTS

| MODEL NO. | FIG. | HP | MOTOR SIZE | DISCH. SIZE | DIMENSIONS IN INCHES | | | | | APPROX. SHIP WT. |
|-----------|------|-------|------------|-------------|----------------------|------|------|-----|-----|------------------|
| | | | | | A | B | C | D | E | |
| 7S03-8 | A | 1/3 | 4" | 1" NPT | 21.5 | 8.8 | 12.7 | 3.8 | 3.9 | 27 |
| 7S05-11 | A | 1/2 | 4" | 1" NPT | 24.7 | 9.5 | 15.2 | 3.8 | 3.9 | 30 |
| 7S07-15 | A | 3/4 | 4" | 1" NPT | 29.2 | 10.7 | 18.5 | 3.8 | 3.9 | 33 |
| 7S10-19 | A | 1 | 4" | 1" NPT | 33.6 | 11.8 | 21.8 | 3.8 | 3.9 | 36 |
| 7S15-26 | A | 1 1/2 | 4" | 1" NPT | 41.2 | 13.6 | 27.6 | 3.8 | 3.9 | 46 |
| 7S20-32 | A | 2 | 4" | 1" NPT | 48.5 | 14.0 | 34.5 | 3.8 | 3.9 | 59 |

NOTES: All models suitable for use in 4" wells.
Weights include pump end with motor in lbs.

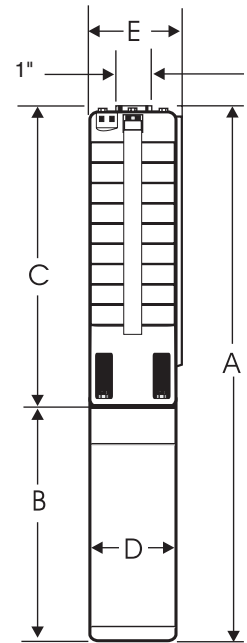


Fig. A

MATERIALS OF CONSTRUCTION

| COMPONENT | SPLINE SHAFT |
|------------------------|-------------------------|
| Check Valve Housing | 304 Stainless Steel |
| Check Valve | 304 Stainless Steel |
| Diffuser Chamber | 304 Stainless Steel |
| Impeller | 304 Stainless Steel |
| Suction Interconnector | 304 Stainless Steel |
| Inlet Screen | 304 Stainless Steel |
| Pump Shaft | 304 Stainless Steel |
| Straps | 304 Stainless Steel |
| Cable Guard | 304 Stainless Steel |
| Priming Inducer | 304 Stainless Steel |
| Coupling | 316/431 Stainless Steel |
| Check Valve Seat | NBR/304 Stainless Steel |
| Top Bearing | NBR |
| Impeller Seal Ring | NBR/PBT (Valox®) |
| Intermediate Bearings | NBR |

NOTES: Specifications subject to change without notice.
Valox® is a registered trademark of General Electric Co.