

KORAX DIAPHRAGM PUMP



① Stainless steel

② Aluminum alloy


KX25 Metal Pump (AL SST)

- Small size & flow rate up to 150lpm
- Fluid pressure up to 7bar
- Central body, covered by anti-corrosion coat
- Reliable air reversing valve

Kx25

KX25 series safe and reliable, widely application

max. working pressure	100psi(0.7Mpa, 7bar)
max. flow rate	150lpm
max. reciprocating speed	276cpm
max. suction height(dry sucking)	5m
max. permitted grain	4mm
max. air consumption	60scfm (1.7m ³ /min)
air inlet size	1/2in. npt (f)
air outlet size	1/2in. npt (f)
fluid inlet size	1in. npt (f)
fluid outlet size	1in. npt (f)
weight	Aluminum pump 8.2kg Stainless steel pump 15.0kg

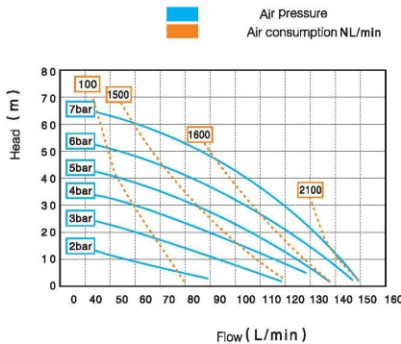

Kx25

DIMENSIONS

