

KORAX DIAPHRAGM PUMP




KX50 Metal Pump(AL SST C1)

- Fluid pressure up to 1 20psi
- Guided air valve can be repaired during working, no need to open the central body.
- The coat can protect from terrible working environment

Kx50

KX50 series Easy to operate and repair

max. working pressure	100psi(0.7Mpa, 7bar)
max. flow rate	570lpm
max. reciprocating speed	145cpm
max. suction height(dry sucking)	5m
max. permitted grain	6mm
max. air consumption	175scfm (4.9m ³ /min)
air inlet size	1/2in. npt (f)
air outlet size	1/2in. npt (f)
fluid inlet size	2in. npt (f)
fluid outlet size	2in. npt (f)
weight	Aluminum pump 29.0kg Stainless steel pump 47.0kg

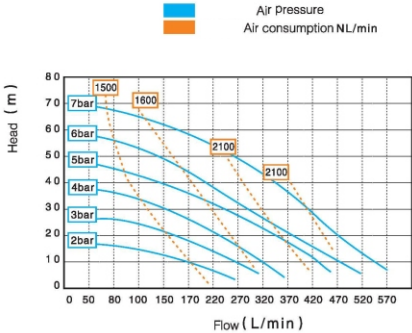

Kx50

DIMENSIONS

