

KORAX DIAPHRAGM PUMP



① Aluminum alloy

② Stainless steel


KX80 Metal Pump(AL SST CI)

- Large flow rate up to 1000Lpm
- Guided air valve can be repaired during working, no need to open the central body.
- The coat can protect from terrible working environment.

Kx80

KX80 flange connection, no fluid leaks.

max. working pressure	100psi(0.7Mpa, 7bar)
max. flow rate	1000lpm
max. reciprocating speed	135cpm
max. suction height (dry sucking)	5m
max. permitted grain	10mm
max. air consumption	325scfm (9.1m ³ /min)
air inlet size	3/4in. npt (f)
air outlet size	3/4in. npt (f)
fluid inlet size	3in. npt (f)
fluid outlet size	3in. npt (f)
weight	Aluminum pump 77.0kg Stainless steel pump 110.0kg

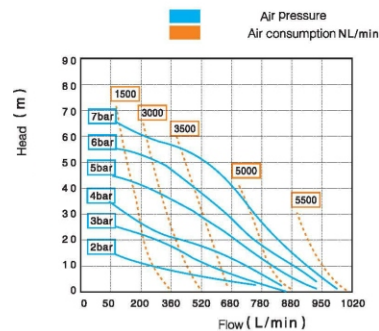

Kx80

DIMENSIONS

