

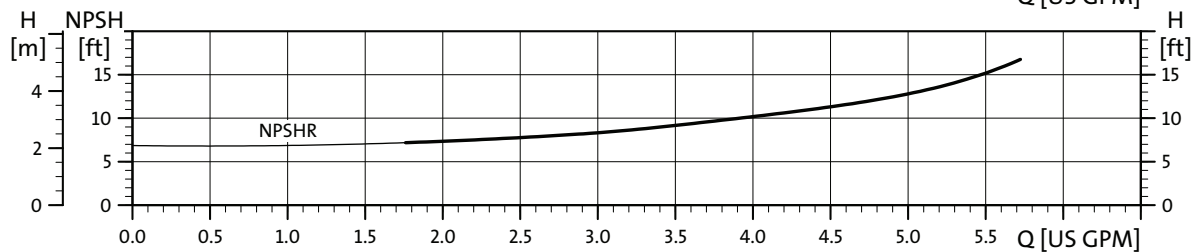
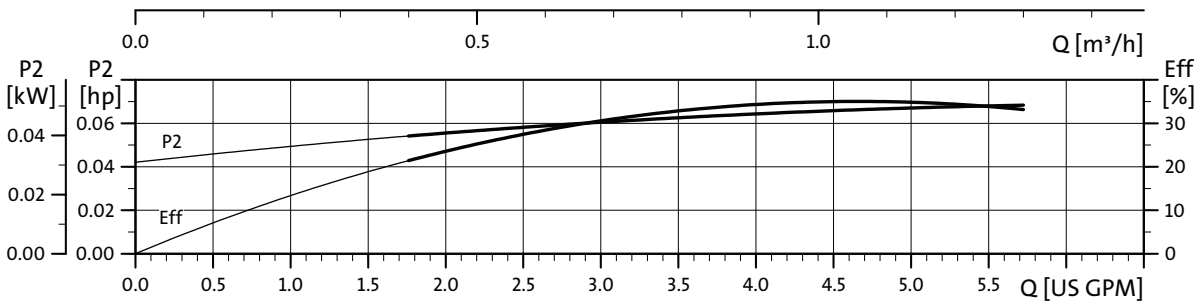



## CR, CRI, CRN 1s

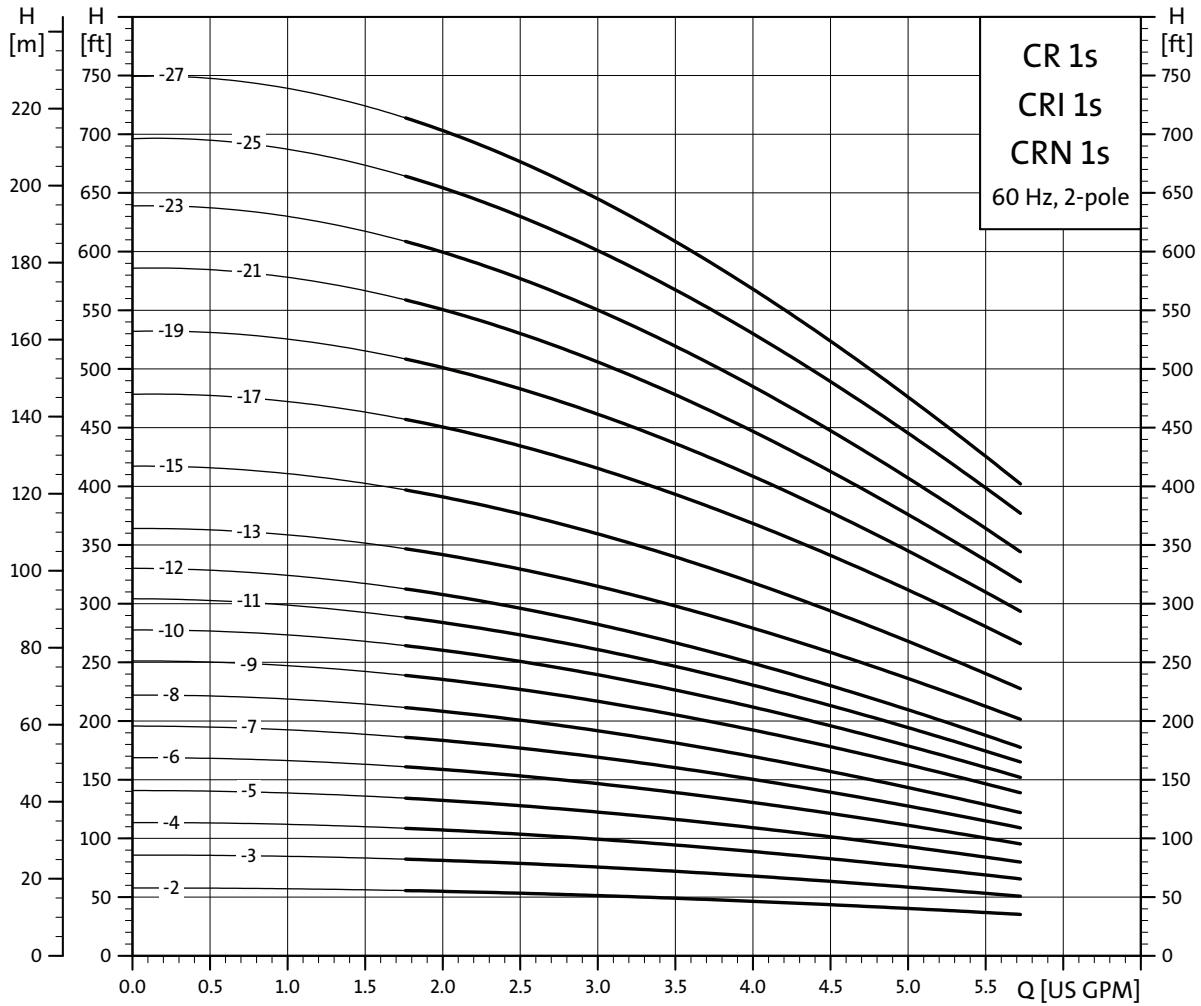

TM02 5741 1303

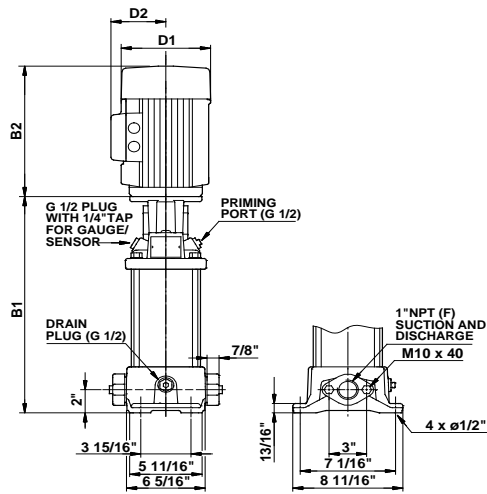

TM03 1450 2205

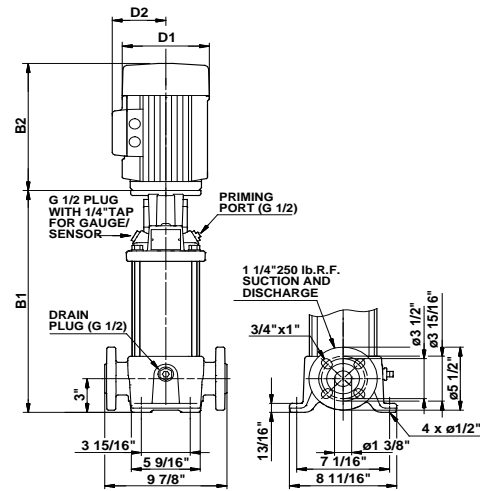


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC		B1+B2	
					D1	D2		
CR 1s-2	1/3	1	•	12	6 1/4	5	21 3/8	69
CR 1s-3	1/3	3	•	12	5 5/8	4 5/8	19 5/8	62
CR 1s-4	1/3	1	•	12 3/4	6 1/4	5	22	70
CR 1s-5	1/3	3	•	12 3/4	5 5/8	4 5/8	20 3/8	63
CR 1s-6	1/2	1	•	13 1/2	6 1/4	5	22 3/4	71
CR 1s-7	1/2	3	•	13 1/2	5 5/8	4 5/8	21	69
CR 1s-8	1/2	1	•	14 1/8	6 1/4	5	23 1/2	75
CR 1s-9	1/2	3	•	14 1/8	5 5/8	4 5/8	21 3/4	70
CR 1s-10	1/2	1	•	14 7/8	6 1/4	5	24 1/4	76
CR 1s-11	1/2	3	•	14 7/8	5 5/8	4 5/8	22 1/2	71
CR 1s-12	1/2	1	•	15 5/8	6 1/4	5	24 7/8	77
CR 1s-13	1/2	3	•	15 5/8	5 5/8	4 5/8	23 1/8	72
CR 1s-14	3/4	1	•	16 1/4	6 1/4	5	26 1/4	82
CR 1s-15	3/4	3	•	16 1/4	5 5/8	4 5/8	23 7/8	73
CR 1s-16	3/4	1	•	17	6 1/4	5	26 7/8	83
CR 1s-17	3/4	3	•	17	5 5/8	4 5/8	24 5/8	74
CR 1s-18	3/4	1	•	17 3/4	6 1/4	5	27 5/8	84
CR 1s-19	3/4	3	•	17 3/4	5 5/8	4 5/8	25 1/4	75
CR 1s-20	3/4	1	•	18 3/8	6 1/4	5	28 3/8	85
CR 1s-21	3/4	3	•	18 3/8	5 5/8	4 5/8	26	76
CR 1s-22	1	1	•	19 1/8	7 1/4	5 3/4	30 3/8	101
CR 1s-23	1	3	•	19 1/8	5 5/8	4 5/8	26 3/4	77
CR 1s-24	1	1	•	20 1/2	7 1/4	5 3/4	31 3/4	103
CR 1s-25	1	3	•	20 1/2	5 5/8	4 5/8	28 1/8	78
CR 1s-26	1 1/2	1	•	22	7 1/4	5 3/4	33 5/8	107
CR 1s-27	1 1/2	3	•	22	5 5/8	4 5/8	30 3/4	84
CR 1s-28	1 1/2	1	-	23 3/8	7 1/4	5 3/4	35	109
CR 1s-29	1 1/2	3	-	23 3/8	5 5/8	4 5/8	32 1/8	86
CR 1s-30	1 1/2	1	-	24 3/4	7 1/4	5 3/4	36 1/2	111
CR 1s-31	1 1/2	3	-	24 3/4	5 5/8	4 5/8	33 1/2	88
CR 1s-32	1 1/2	1	-	26 1/4	7 1/4	5 3/4	37 7/8	113
CR 1s-33	1 1/2	3	-	26 1/4	5 5/8	4 5/8	35	89
CR 1s-34	2	1	-	27 5/8	7 1/4	5 3/4	40 1/4	126
CR 1s-35	2	3	-	27 5/8	7 1/8	4 3/8	39	116
CR 1s-36	2	1	-	29	7 1/4	5 3/4	41 5/8	127
CR 1s-37	2	3	-	29	7 1/8	4 3/8	40 3/8	118


All dimensions in inches unless otherwise noted.

\*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available

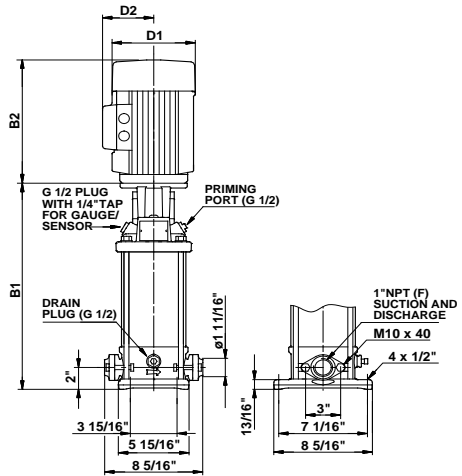

TM03 1452 2205

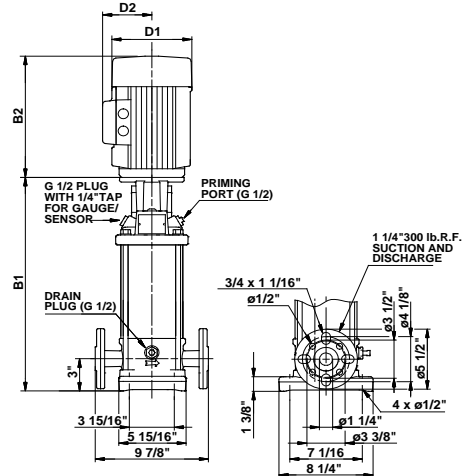


TM03 1453 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC		B1+B2	
					D1	D2		
CRI 1s-2	1/3	1	•	12 1/8	6 1/4	5	21 1/2	63
CRI 1s-2	1/3	3	•	12 1/8	5 5/8	4 5/8	19 3/4	57
CRI 1s-3	1/3	1	•	12 1/8	6 1/4	5	21 1/2	64
CRI 1s-3	1/3	3	•	12 1/8	5 5/8	4 5/8	19 3/4	57
CRI 1s-4	1/3	1	•	12 7/8	6 1/4	5	22 1/8	65
CRI 1s-4	1/3	3	•	12 7/8	5 5/8	4 5/8	20 1/2	58
CRI 1s-5	1/3	1	•	13 1/2	6 1/4	5	22 7/8	66
CRI 1s-5	1/3	3	•	13 1/2	5 5/8	4 5/8	21 1/8	64
CRI 1s-6	1/2	1	•	14 1/4	6 1/4	5	23 5/8	70
CRI 1s-6	1/2	3	•	14 1/4	5 5/8	4 5/8	21 7/8	65
CRI 1s-7	1/2	1	•	15	6 1/4	5	24 3/8	71
CRI 1s-7	1/2	3	•	15	5 5/8	4 5/8	22 5/8	65
CRI 1s-8	1/2	1	•	15 3/4	6 1/4	5	25	72
CRI 1s-8	1/2	3	•	15 3/4	5 5/8	4 5/8	23 1/4	66
CRI 1s-9	3/4	1	•	16 3/8	6 1/4	5	26 3/8	77
CRI 1s-9	3/4	3	•	16 3/8	5 5/8	4 5/8	24	68
CRI 1s-10	3/4	1	•	17 1/8	6 1/4	5	27	78
CRI 1s-10	3/4	3	•	17 1/8	5 5/8	4 5/8	24 3/4	69
CRI 1s-11	3/4	1	•	17 7/8	6 1/4	5	27 3/4	79
CRI 1s-11	3/4	3	•	17 7/8	5 5/8	4 5/8	25 3/8	70
CRI 1s-12	3/4	1	•	18 1/2	6 1/4	5	28 1/2	79
CRI 1s-12	3/4	3	•	18 1/2	5 5/8	4 5/8	26 1/8	70
CRI 1s-13	1	1	•	19 1/4	7 1/4	5 3/4	30 1/2	96
CRI 1s-13	1	3	•	19 1/4	5 5/8	4 5/8	26 7/8	71
CRI 1s-15	1	1	•	20 5/8	7 1/4	5 3/4	31 7/8	97
CRI 1s-15	1	3	•	20 5/8	5 5/8	4 5/8	28 1/4	73
CRI 1s-17	1 1/2	1	•	22 1/8	7 1/4	5 3/4	33 3/4	102
CRI 1s-17	1 1/2	3	•	22 1/8	5 5/8	4 5/8	30 7/8	79
CRI 1s-19	1 1/2	1	-	23 1/2	7 1/4	5 3/4	35 1/8	104
CRI 1s-19	1 1/2	3	-	23 1/2	5 5/8	4 5/8	32 1/4	81
CRI 1s-21	1 1/2	1	-	24 7/8	7 1/4	5 3/4	36 5/8	106
CRI 1s-21	1 1/2	3	-	24 7/8	5 5/8	4 5/8	33 5/8	82
CRI 1s-23	1 1/2	1	-	26 3/8	7 1/4	5 3/4	38	107
CRI 1s-23	1 1/2	3	-	26 3/8	5 5/8	4 5/8	35 1/8	84
CRI 1s-25	2	1	-	27 3/4	7 1/4	5 3/4	40 3/8	120
CRI 1s-25	2	3	-	27 3/4	7 1/8	4 3/8	39 1/8	111
CRI 1s-27	2	1	-	29 1/8	7 1/4	5 3/4	41 3/4	122
CRI 1s-27	2	3	-	29 1/8	7 1/8	4 3/8	40 1/2	113


All dimensions in inches unless otherwise noted.

\*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

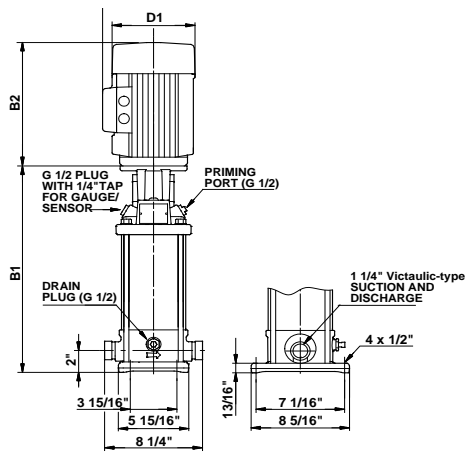

TM03 1454 2205

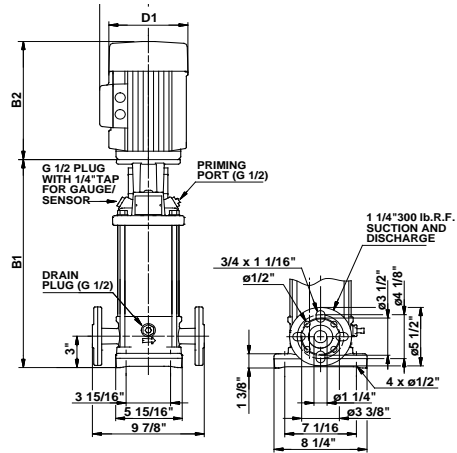

TM03 1453 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			
					D1	D2	B1+B2	
CRN 1s-2	1/3	1 3	• •	12 1/8 12 1/8	6 1/4 5 5/8	5 4 5/8	21 1/2 19 3/4	63 56
CRN 1s-3	1/3	1 3	• •	12 1/8 12 1/8	6 1/4 5 5/8	5 4 5/8	21 1/2 19 3/4	64 57
CRN 1s-4	1/3	1 3	• •	12 7/8 12 7/8	6 1/4 5 5/8	5 4 5/8	22 1/8 20 1/2	65 58
CRN 1s-5	1/3	1 3	• •	13 1/2 13 1/2	6 1/4 5 5/8	5 4 5/8	22 7/8 21 1/8	66 64
CRN 1s-6	1/2	1 3	• •	14 1/4 14 1/4	6 1/4 5 5/8	5 4 5/8	23 5/8 21 7/8	70 65
CRN 1s-7	1/2	1 3	• •	15 15	6 1/4 5 5/8	5 4 5/8	24 3/8 22 5/8	71 65
CRN 1s-8	1/2	1 3	• •	15 3/4 15 3/4	6 1/4 5 5/8	5 4 5/8	25 23 1/4	72 66
CRN 1s-9	3/4	1 3	• •	16 3/8 16 3/8	6 1/4 5 5/8	5 4 5/8	26 3/8 24	77 68
CRN 1s-10	3/4	1 3	• •	17 1/8 17 1/8	6 1/4 5 5/8	5 4 5/8	27 24 3/4	78 69
CRN 1s-11	3/4	1 3	• •	17 7/8 17 7/8	6 1/4 5 5/8	5 4 5/8	27 3/4 25 3/8	78 69
CRN 1s-12	3/4	1 3	• •	18 1/2 18 1/2	6 1/4 5 5/8	5 4 5/8	28 1/2 26 1/8	79 70
CRN 1s-13	1	1 3	• •	19 1/4 19 1/4	7 1/4 5 5/8	5 3/4 4 5/8	30 1/2 26 7/8	96 71
CRN 1s-15	1	1 3	• •	20 5/8 20 5/8	7 1/4 5 5/8	5 3/4 4 5/8	31 7/8 28 1/4	97 73
CRN 1s-17	1 1/2	1 3	• •	22 1/8 22 1/8	7 1/4 5 5/8	5 3/4 4 5/8	33 3/4 30 7/8	102 79
CRN 1s-19	1 1/2	1 3	• •	23 1/2 23 1/2	7 1/4 5 5/8	5 3/4 4 5/8	35 1/8 32 1/4	104 80
CRN 1s-21	1 1/2	1 3	• •	24 7/8 24 7/8	7 1/4 5 5/8	5 3/4 4 5/8	36 5/8 33 5/8	105 82
CRN 1s-23	1 1/2	1 3	• •	26 3/8 26 3/8	7 1/4 5 5/8	5 3/4 4 5/8	38 35 1/8	107 84
CRN 1s-25	2	1 3	• •	27 3/4 27 3/4	7 1/4 7 1/8	5 3/4 4 3/8	40 3/8 39 1/8	120 111
CRN 1s-27	2	1 3	• •	29 1/8 29 1/8	7 1/4 7 1/8	5 3/4 4 3/8	41 3/4 40 1/2	122 113

All dimensions in inches unless otherwise noted.


\*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.


## CR(E), CRI(E), CRN(E) 1

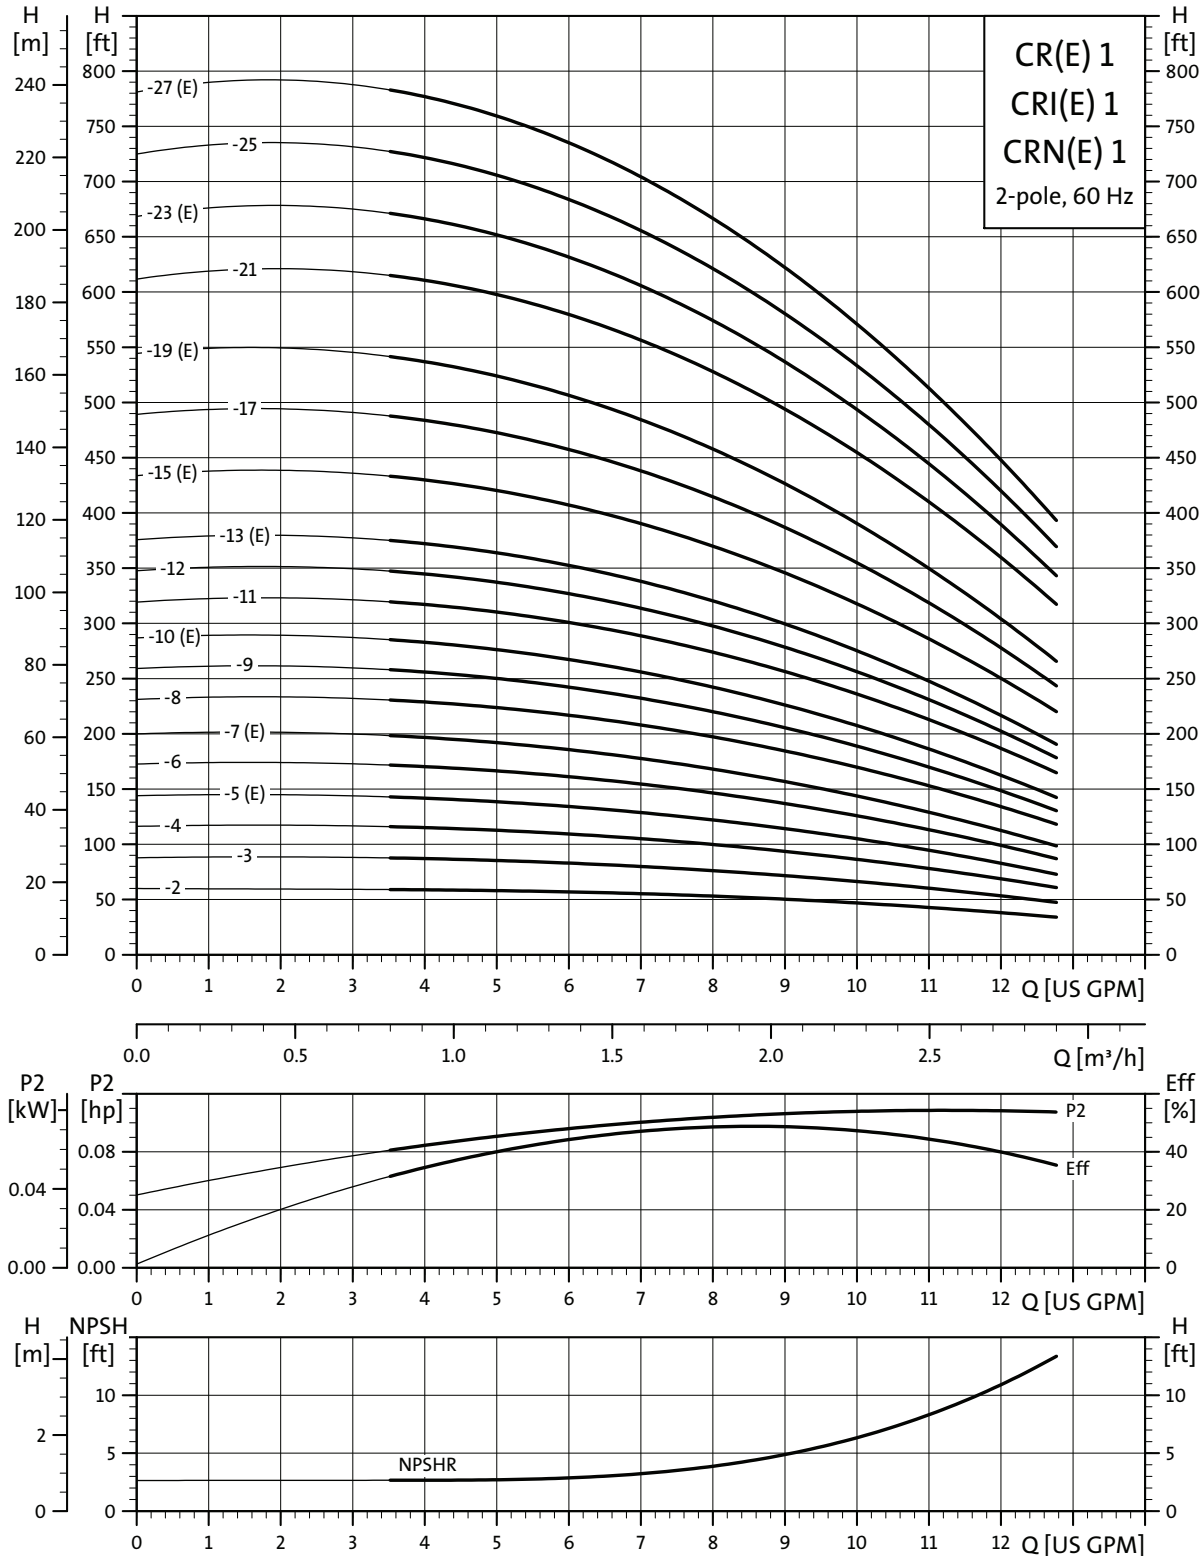

TM02 4083 1303

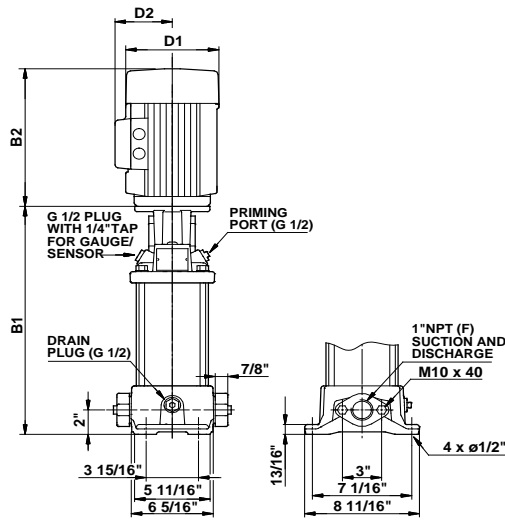

TM03 1450 2205

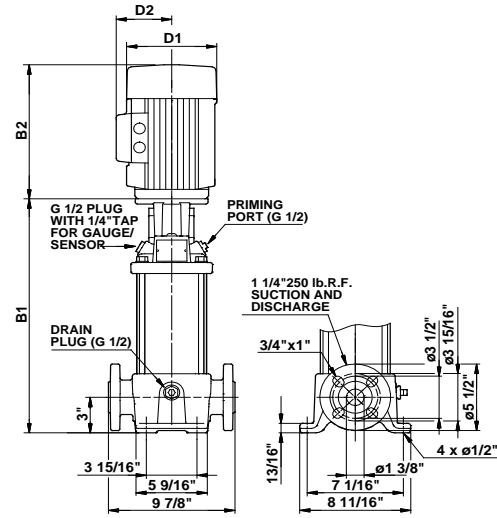


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]					Ship Wt. [lbs.]	ANSI dimensions [inch]			
				B1	TEFC			MLE			Ship Wt. [lbs.]		
					D1	D2	B1+B2	D1		D2		B1+B2	
CR 1-2	1/3	1	•	12	6 1/4	5	21 3/8	69	-	-	-	-	
		3	•	12	5 5/8	4 5/8	19 5/8	62	-	-	-	-	
CR 1-3	1/3	1	•	12	6 1/4	5	21 3/8	69	-	-	-	-	
		3	•	12	5 5/8	4 5/8	19 5/8	62	-	-	-	-	
CR 1-4	1/2	1	•	12 3/4	6 1/4	5	22 1/8	73	-	-	-	-	
		3	•	12 3/4	5 5/8	4 5/8	20 3/8	63	-	-	-	-	
CR(E) 1-5	1/2	1	•	13 1/2	6 1/4	5	22 7/8	74	5 1/2	5 1/2	21	72	
		3	•	13 1/2	5 5/8	4 5/8	21	69	-	-	-	-	
CR 1-6	3/4	1	•	14 1/8	6 1/4	5	24 1/8	80	-	-	-	-	
		3	•	14 1/8	5 5/8	4 5/8	21 3/4	71	-	-	-	-	
CR(E) 1-7	3/4	1	•	14 7/8	6 1/4	5	24 3/4	81	5 1/2	5 1/2	22 3/8	75	
		3	•	14 7/8	5 5/8	4 5/8	22 1/2	72	-	-	-	-	
CR 1-8	1	1	•	15 5/8	7 1/4	5 3/4	26 3/4	93	-	-	-	-	
		3	•	15 5/8	5 5/8	4 5/8	23 1/8	72	-	-	-	-	
CR 1-9	1	1	•	16 1/4	7 1/4	5 3/4	27 1/2	94	-	-	-	-	
		3	•	16 1/4	5 5/8	4 5/8	23 7/8	74	-	-	-	-	
CR(E) 1-10	1	1	•	17	7 1/4	5 3/4	28 1/4	95	5 1/2	5 1/2	26 1/8	80	
		3	•	17	5 5/8	4 5/8	24 5/8	74	7	6 5/8	30	97	
CR 1-11	1 1/2	1	•	17 3/4	7 1/4	5 3/4	29 3/8	102	-	-	-	-	
		3	•	17 3/4	5 5/8	4 5/8	26 1/2	76	-	-	-	-	
CR 1-12	1 1/2	1	•	18 3/8	7 1/4	5 3/4	30 1/8	103	-	-	-	-	
		3	•	18 3/8	5 5/8	4 5/8	27 1/4	77	-	-	-	-	
CR(E) 1-13	1 1/2	1	•	19 1/8	7 1/4	5 3/4	30 3/4	104	5 1/2	5 1/2	28 1/4	86	
		3	•	19 1/8	5 5/8	4 5/8	27 7/8	77	7	6 5/8	32 1/8	102	
CR(E) 1-15	2	1	•	20 1/2	7 1/4	5 3/4	33 1/8	114	-	-	-	-	
		3	•	20 1/2	7 1/8	4 3/8	31 7/8	104	7	6 5/8	33 1/2	117	
CR 1-17	2	1	•	22	7 1/4	5 3/4	34 1/2	116	-	-	-	-	
		3	•	22	7 1/8	4 3/8	33 3/8	106	-	-	-	-	
CR(E) 1-19	2	1	-	23 3/8	7 1/4	5 3/4	36	118	-	-	-	-	
		3	-	23 3/8	7 1/8	4 3/8	34 3/4	108	7	6 5/8	36 3/8	121	
CR 1-21	3	1	-	25 7/8	8 5/8	6 7/8	40 1/4	157	-	-	-	-	
		3	-	25 7/8	7 1/8	4 3/8	37 1/2	115	-	-	-	-	
CR(E) 1-23	3	1	-	27 1/4	8 5/8	6 7/8	41 3/4	159	-	-	-	-	
		3	-	27 1/4	7 1/8	4 3/8	39	120	8 3/4	7 1/2	40 5/8	139	
CR 1-25	3	1	-	28 3/4	8 5/8	6 7/8	43 1/8	161	-	-	-	-	
		3	-	28 3/4	7 1/8	4 3/8	40 3/8	122	-	-	-	-	
CR(E) 1-27	3	1	-	30 1/8	8 5/8	6 7/8	44 1/2	163	-	-	-	-	
		3	-	30 1/8	7 1/8	4 3/8	41 3/4	124	8 3/4	7 1/2	43 1/2	142	


All dimensions in inches unless otherwise noted.

\*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

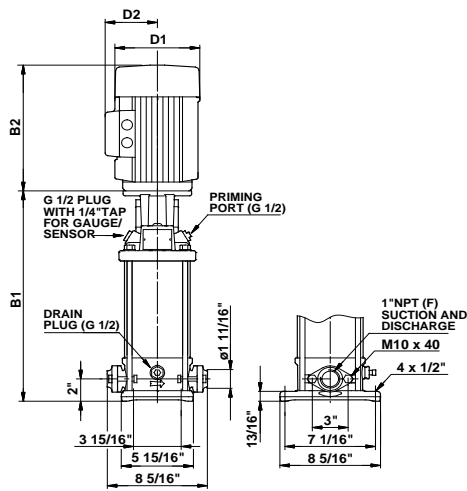

TM03 1450 2205

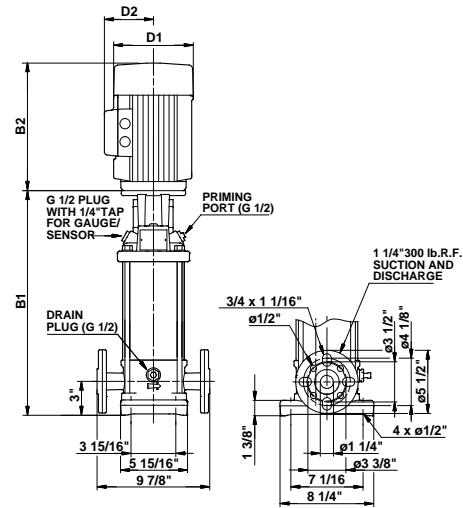


TM03 1451 2205.

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
				B1	TEFC				MLE			
					D1	D2	B1+B2		D1	D2	B1+B2	
CRI 1-2	1/3	1	•	12 1/8	6 1/4	5	21 1/2	63	-	-	-	-
		3	•	12 1/8	5 5/8	4 5/8	19 3/4	57	-	-	-	-
CRI 1-3	1/3	1	•	12 1/8	6 1/4	5	21 1/2	64	-	-	-	-
		3	•	12 1/8	5 5/8	4 5/8	19 3/4	57	-	-	-	-
CRI 1-4	1/2	1	•	12 7/8	6 1/4	5	22 1/4	68	-	-	-	-
		3	•	12 7/8	5 5/8	4 5/8	20 1/2	58	-	-	-	-
CRI(E) 1-5	1/2	1	•	13 1/2	6 1/4	5	22 7/8	69	5 1/2	5 1/2	21 1/8	67
		3	•	13 1/2	5 5/8	4 5/8	21 1/8	64	-	-	-	-
CRI 1-6	3/4	1	•	14 1/4	6 1/4	5	24 1/4	74	-	-	-	-
		3	•	14 1/4	5 5/8	4 5/8	21 7/8	65	-	-	-	-
CRI(E) 1-7	3/4	1	•	15	6 1/4	5	24 7/8	75	5 1/2	5 1/2	22 1/2	70
		3	•	15	5 5/8	4 5/8	22 5/8	66	-	-	-	-
CRI 1-8	1	1	•	15 3/4	7 1/4	5 3/4	26 7/8	88	-	-	-	-
		3	•	15 3/4	5 5/8	4 5/8	23 1/4	67	-	-	-	-
CRI 1-9	1	1	•	16 3/8	7 1/4	5 3/4	27 5/8	89	-	-	-	-
		3	•	16 3/8	5 5/8	4 5/8	24	68	-	-	-	-
CRI(E) 1-10	1	1	•	17 1/8	7 1/4	5 3/4	28 3/8	90	5 1/2	5 1/2	26 1/4	75
		3	•	17 1/8	5 5/8	4 5/8	24 3/4	69	7	6 5/8	30 1/8	92
CRI 1-11	1 1/2	1	•	17 7/8	7 1/4	5 3/4	29 1/2	97	-	-	-	-
		3	•	17 7/8	5 5/8	4 5/8	26 5/8	70	-	-	-	-
CRI 1-12	1 1/2	1	•	18 1/2	7 1/4	5 3/4	30 1/4	98	-	-	-	-
		3	•	18 1/2	5 5/8	4 5/8	27 1/4	71	-	-	-	-
CRI(E) 1-13	1 1/2	1	•	19 1/4	7 1/4	5 3/4	30 7/8	99	5 1/2	5 1/2	28 3/8	81
		3	•	19 1/4	5 5/8	4 5/8	28	72	7	6 5/8	32 1/4	97
CRI(E) 1-15	2	1	•	20 5/8	7 1/4	5 3/4	33 1/4	109	-	-	-	-
		3	•	20 5/8	7 1/8	4 3/8	32	99	7	6 5/8	33 5/8	112
CRI 1-17	2	1	•	22 1/8	7 1/4	5 3/4	34 5/8	110	-	-	-	-
		3	•	22 1/8	7 1/8	4 3/8	33 1/2	101	-	-	-	-
CRI(E) 1-19	2	1	-	23 1/2	7 1/4	5 3/4	36 1/8	112	-	-	-	-
		3	-	23 1/2	7 1/8	4 3/8	34 7/8	103	7	6 5/8	36 1/2	117
CRI 1-21	3	1	-	26	8 5/8	6 7/8	40 3/8	150	-	-	-	-
		3	-	26	7 1/8	4 3/8	37 5/8	108	-	-	-	-
CRI(E) 1-23	3	1	-	27 3/8	8 5/8	6 7/8	41 7/8	152	-	-	-	-
		3	-	27 3/8	7 1/8	4 3/8	39 1/8	113	8 3/4	7 1/2	40 3/4	134
CRI 1-25	3	1	-	28 7/8	8 5/8	6 7/8	43 1/4	154	-	-	-	-
		3	-	28 7/8	7 1/8	4 3/8	40 1/2	115	-	-	-	-
CRI(E) 1-27	3	1	-	30 1/4	8 5/8	6 7/8	44 5/8	156	-	-	-	-
		3	-	30 1/4	7 1/8	4 3/8	41 7/8	117	8 3/4	7 1/2	43 5/8	137


All dimensions in inches unless otherwise noted.

\*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

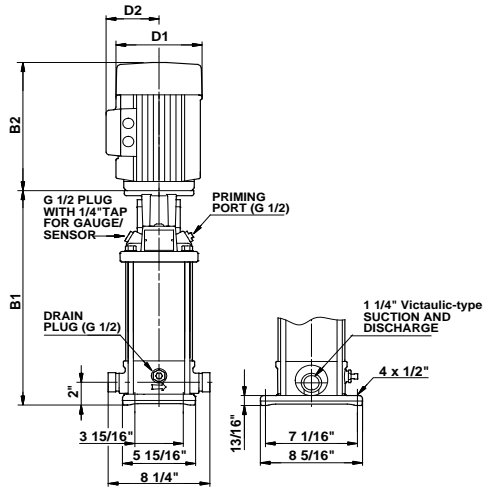

TM03 1454 2205

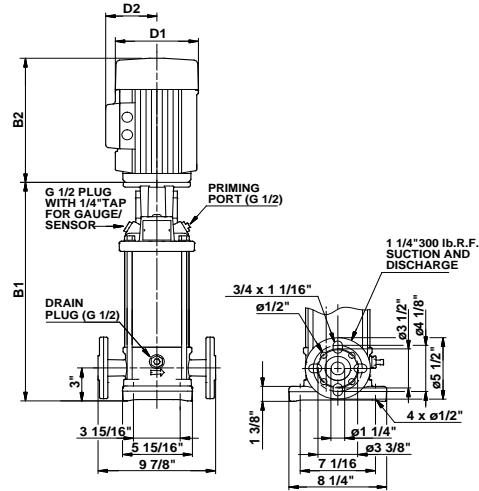

TM03 1453 2205

Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]						
				B1	TEFC				D1	D2	B1+B2	Ship Wt. [lbs.]	MLE		
					D1	D2	B1+B2						D1	D2	B1+B2
CRN 1-2	1/3	1	•	12 1/8	6 1/4	5	21 1/2	63	-	-	-	-			
		3	•	12 1/8	5 5/8	4 5/8	19 3/4	57	-	-	-	-			
CRN 1-3	1/3	1	•	12 1/8	6 1/4	5	21 1/2	64	-	-	-	-			
		3	•	12 1/8	5 5/8	4 5/8	19 3/4	57	-	-	-	-			
CRN 1-4	1/2	1	•	12 7/8	6 1/4	5	22 1/4	68	-	-	-	-			
		3	•	12 7/8	5 5/8	4 5/8	20 1/2	58	-	-	-	-			
CRN(E) 1-5	1/2	1	•	13 1/2	6 1/4	5	22 7/8	69	5 1/2	5 1/2	21 1/8	67			
		3	•	13 1/2	5 5/8	4 5/8	21 1/8	64	-	-	-	-			
CRN 1-6	3/4	1	•	14 1/4	6 1/4	5	24 1/4	74	-	-	-	-			
		3	•	14 1/4	5 5/8	4 5/8	21 7/8	65	-	-	-	-			
CRN(E) 1-7	3/4	1	•	15	6 1/4	5	24 7/8	75	5 1/2	5 1/2	24 1/2	70			
		3	•	15	5 5/8	4 5/8	22 5/8	66	-	-	-	-			
CRN 1-8	1	1	•	15 3/4	7 1/4	5 3/4	26 7/8	88	-	-	-	-			
		3	•	15 3/4	5 5/8	4 5/8	23 1/4	67	-	-	-	-			
CRN 1-9	1	1	•	16 3/8	7 1/4	5 3/4	27 5/8	89	-	-	-	-			
		3	•	16 3/8	5 5/8	4 5/8	24	68	-	-	-	-			
CRN(E) 1-10	1	1	•	17 1/8	7 1/4	5 3/4	28 3/8	90	5 1/2	5 1/2	26 1/4	75			
		3	•	17 1/8	5 5/8	4 5/8	24 3/4	69	7	6 5/8	30 1/8	92			
CRN 1-11	1 1/2	1	•	17 7/8	7 1/4	5 3/4	29 1/2	97	-	-	-	-			
		3	•	17 7/8	5 5/8	4 5/8	26 5/8	70	-	-	-	-			
CRN 1-12	1 1/2	1	•	18 1/2	7 1/4	5 3/4	30 1/4	98	-	-	-	-			
		3	•	18 1/2	5 5/8	4 5/8	27 1/4	71	-	-	-	-			
CRN(E) 1-13	1 1/2	1	•	19 1/4	7 1/4	5 3/4	30 7/8	99	5 1/2	5 1/2	28 3/8	81			
		3	•	19 1/4	5 5/8	4 5/8	28	72	7	6 5/8	32 1/4	97			
CRN(E) 1-15	2	1	•	20 5/8	7 1/4	5 3/4	33 1/4	108	-	-	-	-			
		3	•	20 5/8	7 1/8	4 3/8	32	99	7	6 5/8	33 5/8	112			
CRN 1-17	2	1	•	22 1/8	7 1/4	5 3/4	34 5/8	110	-	-	-	-			
		3	•	22 1/8	7 1/8	4 3/8	33 1/2	101	-	-	-	-			
CRN(E) 1-19	2	1	•	23 1/2	7 1/4	5 3/4	36 1/8	112	-	-	-	-			
		3	•	23 1/2	7 1/8	4 3/8	34 7/8	103	7	6 5/8	36 1/2	117			
CRN 1-21	3	1	•	26	8 5/8	6 7/8	40 3/8	150	-	-	-	-			
		3	•	26	7 1/8	4 3/8	37 5/8	108	-	-	-	-			
CRN(E) 1-23	3	1	•	27 3/8	8 5/8	6 7/8	41 7/8	152	-	-	-	-			
		3	•	27 3/8	7 1/8	4 3/8	39 1/8	113	8 3/4	7 1/2	40 3/4	134			
CRN 1-25	3	1	•	28 7/8	8 5/8	6 7/8	43 1/4	154	-	-	-	-			
		3	•	28 7/8	7 1/8	4 3/8	40 1/2	114	-	-	-	-			
CRN(E) 1-27	3	1	•	30 1/4	8 5/8	6 7/8	44 5/8	156	-	-	-	-			
		3	•	30 1/4	7 1/8	4 3/8	41 7/8	116	8 3/4	7 1/2	43 5/8	137			

All dimensions in inches unless otherwise noted.

\*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available