



SERIE M2.5X


2.5 Ips/150 lpm

Diámetro nominal 4"


Descarga 2"

Rango de flujo: 60 a 180 lpm

1 a 3 Ips

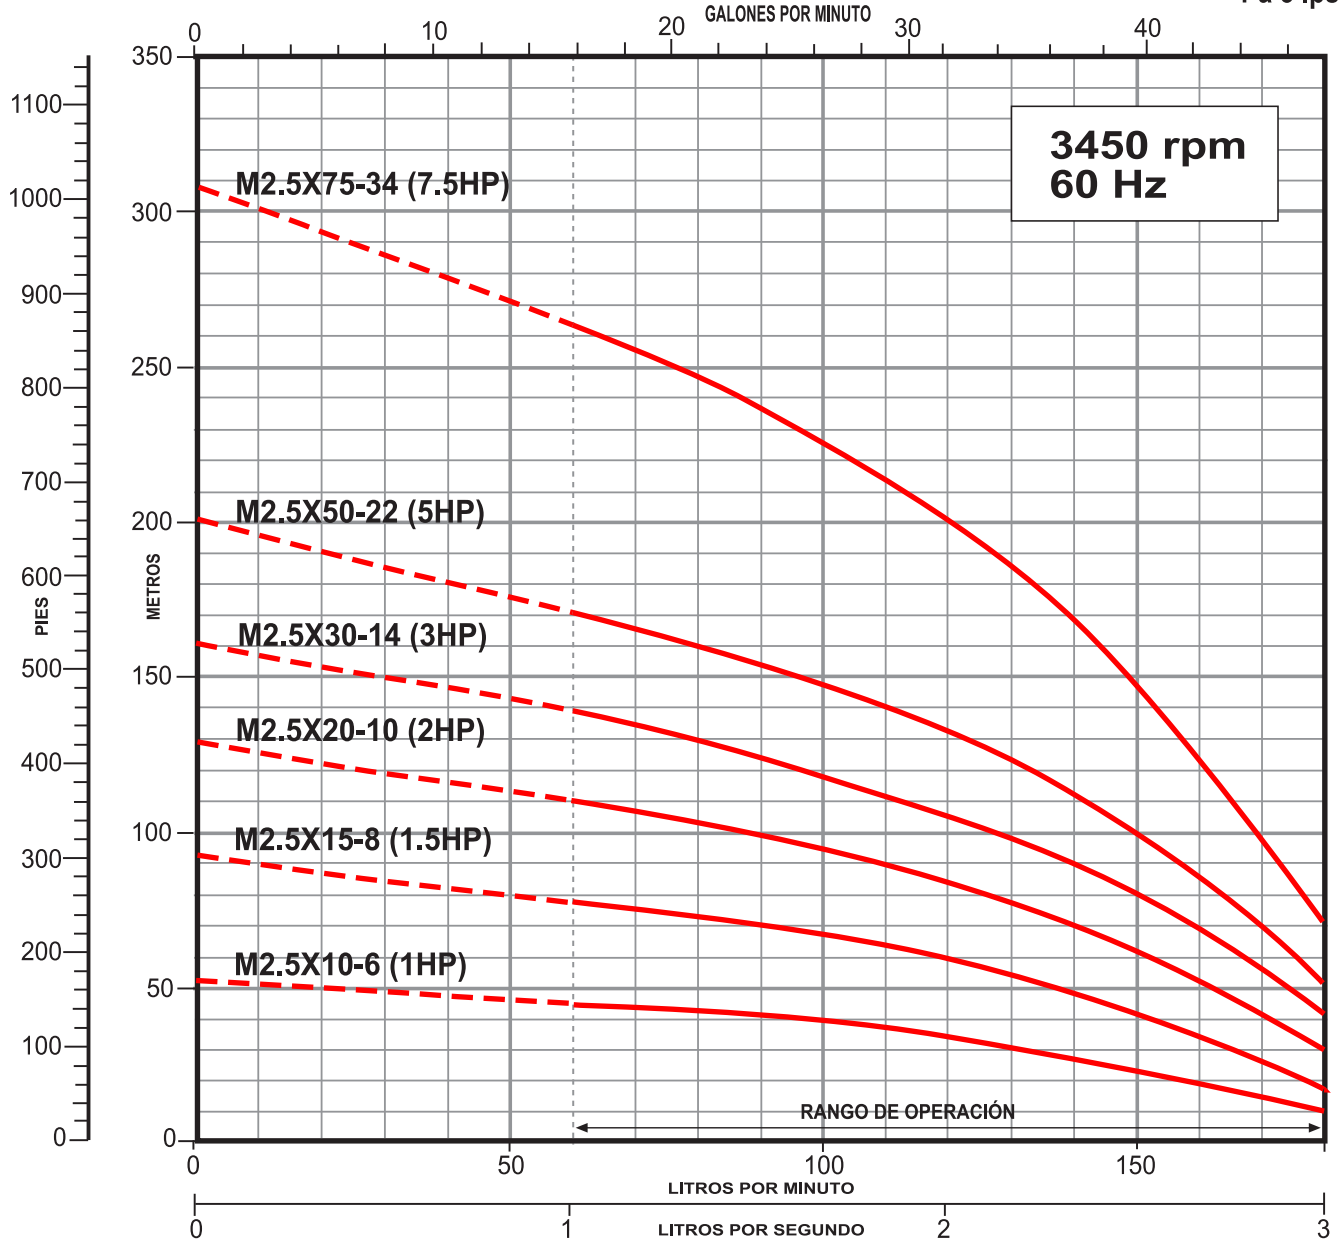

OPERAR FUERA DE RANGO CAUSA DAÑO MECÁNICO EN LA BOMBA Y ALTO CONSUMO DE ENERGÍA.



Dimensiones

| Modelo / Código VDE | A (mm) | B NPT | D (mm) | Peso Kg. |
|---------------------|--------|-------|--------|----------|
| M2.5X10-6 | 359 | 2" | 95 | 3.4 |
| M2.5X15-8 | 483 | 2" | 95 | 4.6 |
| M2.5X20-10 | 607 | 2" | 95 | 5.7 |
| M2.5X30-14 | 731 | 2" | 95 | 6.9 |
| M2.5X50-22 | 893 | 2" | 95 | 8.1 |
| M2.5X75-34 | 1257 | 2" | 95 | 11.6 |

Características

| Modelo / Código VDE | HP | Q = Gasto | | | | | Rango de Carga (m) | Máxima Eficiencia | | |
|---------------------|-----|------------|-----|-----|-----|-----|--------------------|-------------------|-----------|-------------|
| | | l/min | 0 | 70 | 90 | 140 | | 180 | Carga (m) | Gasto (lpm) |
| M2.5X10-6 | 1 | H (metros) | 52 | 43 | 40 | 27 | 9 | 9 - 44 | 30 | 132 |
| M2.5X15-8 | 1.5 | | 91 | 75 | 69 | 48 | 17 | 18 - 78 | 51 | 132 |
| M2.5X20-10 | 2 | | 128 | 106 | 99 | 70 | 29 | 30 - 110 | 75 | 132 |
| M2.5X30-14 | 3 | | 160 | 133 | 123 | 89 | 40 | 40 - 140 | 95 | 132 |
| M2.5X50-22 | 5 | | 200 | 165 | 152 | 111 | 50 | 50 - 170 | 119 | 132 |
| M2.5X75-34 | 7.5 | | 309 | 255 | 236 | 167 | 69 | 69 - 262 | 180 | 132 |