


Rendimiento del Modelo 1000STS8

Información sobre Dimensiones

HP	Etapas	Recorte	Tam. de Motor	P (Pulg)	M* (Pulg)	MD* (Pulg)	Peso Motor (Lbs)	Peso Bomba (Lbs)
25	1	1A	6"	25.7	33.1	5.44	140	93
40	2	1A 1B	6"	33.1	40.8	5.44	182	122
40	2	1A 1B	8"	34.5	36.4	7.70	274	143
60	3	3A	6"	40.5	61.3	5.44	291	152
60	3	3A	8"	41.8	42.1	7.70	344	173
75	4	1A 3B	8"	49.2	47.4	7.70	399	203
100	5	5A	8"	56.6	54.9	7.70	481	233
125	7	7B	8"	71.3	68.8	7.70	644	293


Nota: *MD diámetro = Motor Franklin Electric, M = Longitud Máxima de Motor Franklin Electric

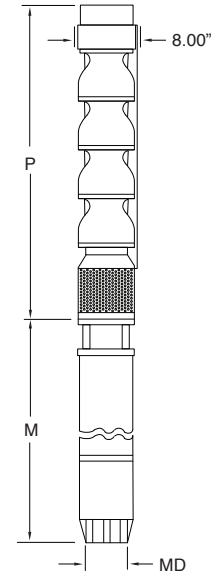

Información para Pedidos

Bombas Turbina Sumergible de 8"								
GPM	HP	Etapas	Tamaño de Recorte	Tam. de Montaje del Motor	Tamaño de Descarga	No. de Orden	No. Modelo	Peso (Lbs)
1000	25	1	1A	6"	6" NPT	97081000001	1000STS25D8A-0166	111
	40	2	1A 1B	6"	6" NPT	97081000002	1000STS40D8X-0266	140
	40	2	1A 1B	8"	6" NPT	97081000902	1000STS40D8X-0286	161
	60	3	3A	6"	6" NPT	97081000003	1000STS60D8A-0366	173
	60	3	3A	8"	6" NPT	97081000903	1000STS60D8A-0386	194
	75	4	1A 3B	8"	6" NPT	97081000904	1000STS75D8X-0486	227
	100	5	5A	8"	6" NPT	97081000905	1000STS100D8A-0586	261
	125	7	7B	8"	6" NPT	97081000907	1000STS125D8B-0786	370

Rendimiento del Modelo 1000STS8

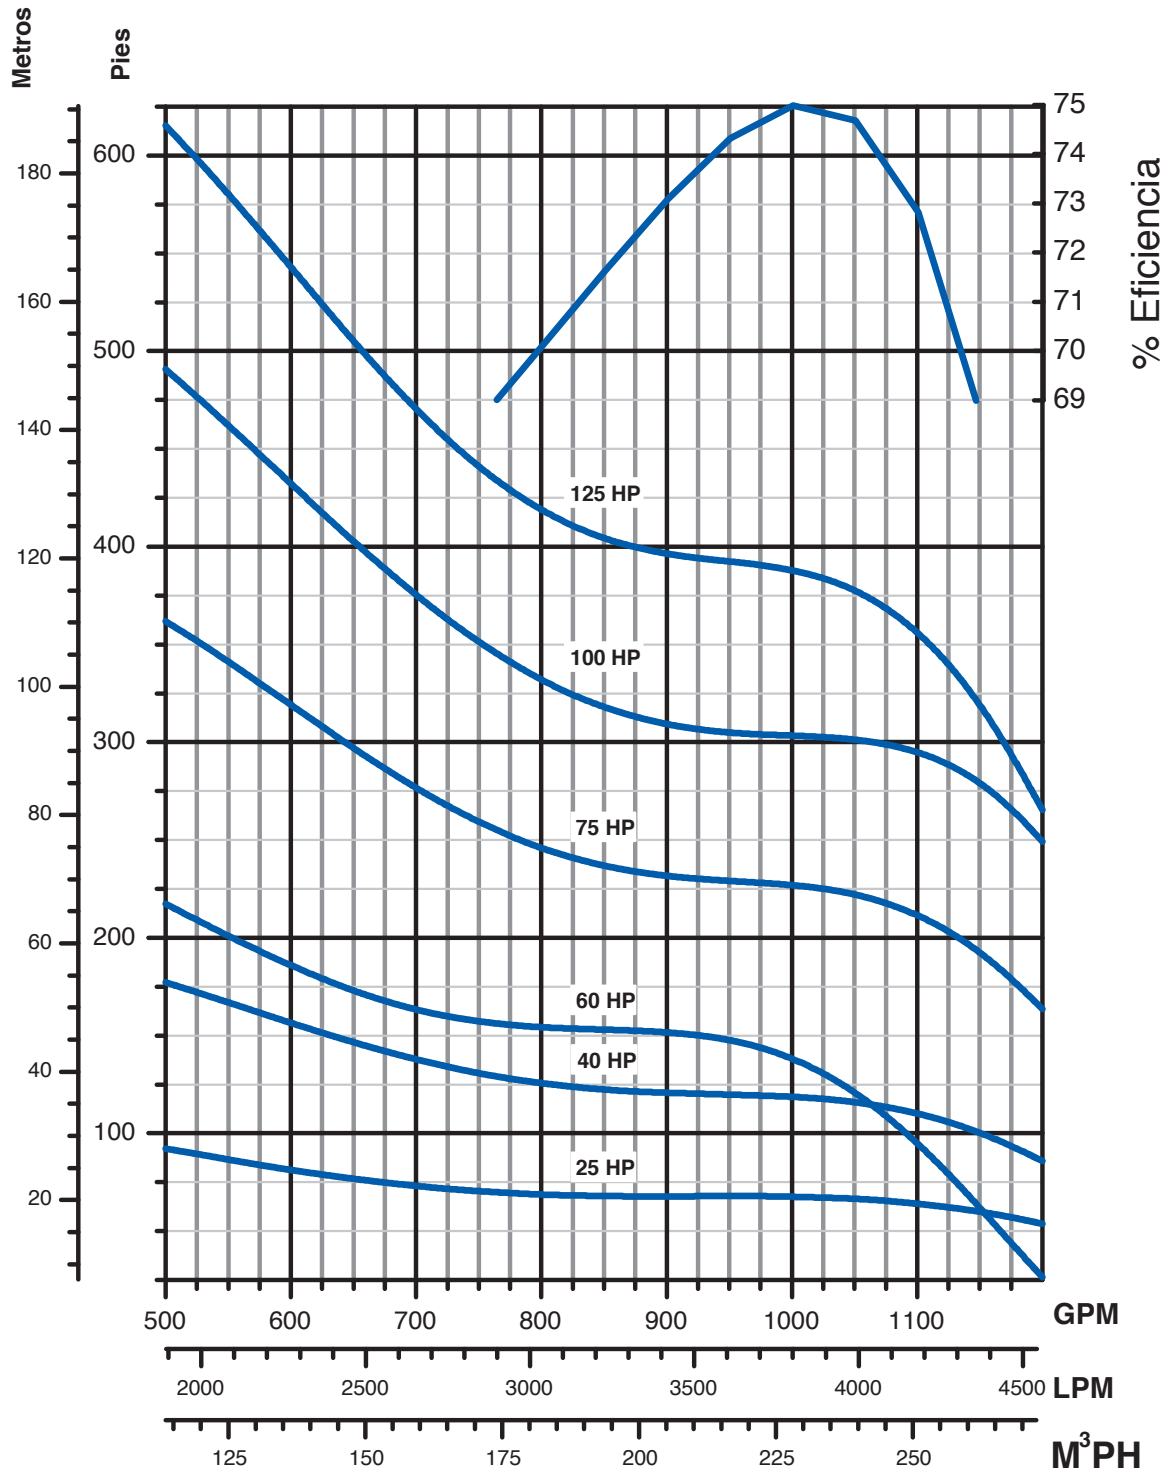

— Rango de operación recomendado

Nota: Rendimiento basado en:
 -Agua dulce, 68 °F (20 °C)
 -Motor de 6" / 3450 rpm
 -Motor de 8" / 3520 rpm