


Rendimiento de Modelo 350STS8

Información sobre Dimensiones

HP	Etapas	Recorte	Tam. de Motor	P	M*	MD*	Peso Motor	Peso Bomba
				Pulg.	Pulg.	Pulg.	Lbs.	Lbs.
7.5	1	1B	6"	24.7	24.2	5.44	99	94
10	2	2C	6"	31.1	25.4	5.44	103	124
15	2	2B	6"	31.1	28.0	5.44	114	124
20	2	1A 1B	6"	31.1	30.6	5.44	126	124
25	2	2A	6"	31.1	33.1	5.44	140	124
30	3	2A 1B	6"	37.5	35.7	5.44	154	154


Nota: *MD diámetro = Motor Franklin Electric, M = Longitud Máxima de Motor Franklin Electric.

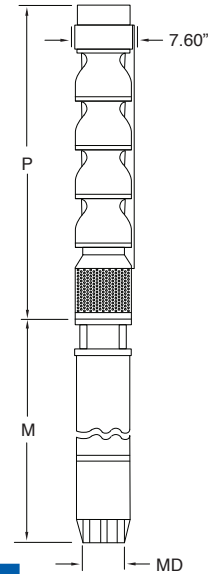

Información para Pedidos

Bomba Turbina Sumergible de 8"								
GPM	HP	Etapas	Tamaño de Recorte	Tam. de Montaje del Motor	Tamaño de Descarga	No. de Orden	No. Modelo	Peso (Lbs)
350	7.5	1	1B	6"	4" NPT	97080350001	350STS7D8B-0164	110
	7.5	1	1B	6"	6" NPT	97080350101	350STS7D8B-0166	110
	10	2	2C	6"	4" NPT	97080350002	350STS10D8C-0264	142
	10	2	2C	6"	6" NPT	97080350102	350STS10D8C-0266	142
	15	2	2B	6"	4" NPT	97080350202	350STS15D8B-0264	142
	15	2	2B	6"	6" NPT	97080350302	350STS15D8B-0266	142
	20	2	1A 1B	6"	4" NPT	97080350402	350STS20D8X-0264	142
	20	2	1A 1B	6"	6" NPT	97080350502	350STS20D8X-0266	142
	25	2	2A	6"	4" NPT	97080350602	350STS25D8A-0264	142
	25	2	2A	6"	6" NPT	97080350702	350STS25D8A-0266	142
	30	3	2A 1B	6"	4" NPT	97080350003	350STS30D8X-0364	175
	30	3	2A 1B	6"	6" NPT	97080350103	350STS30D8X-0366	175

Rendimiento de Modelo 350STS8

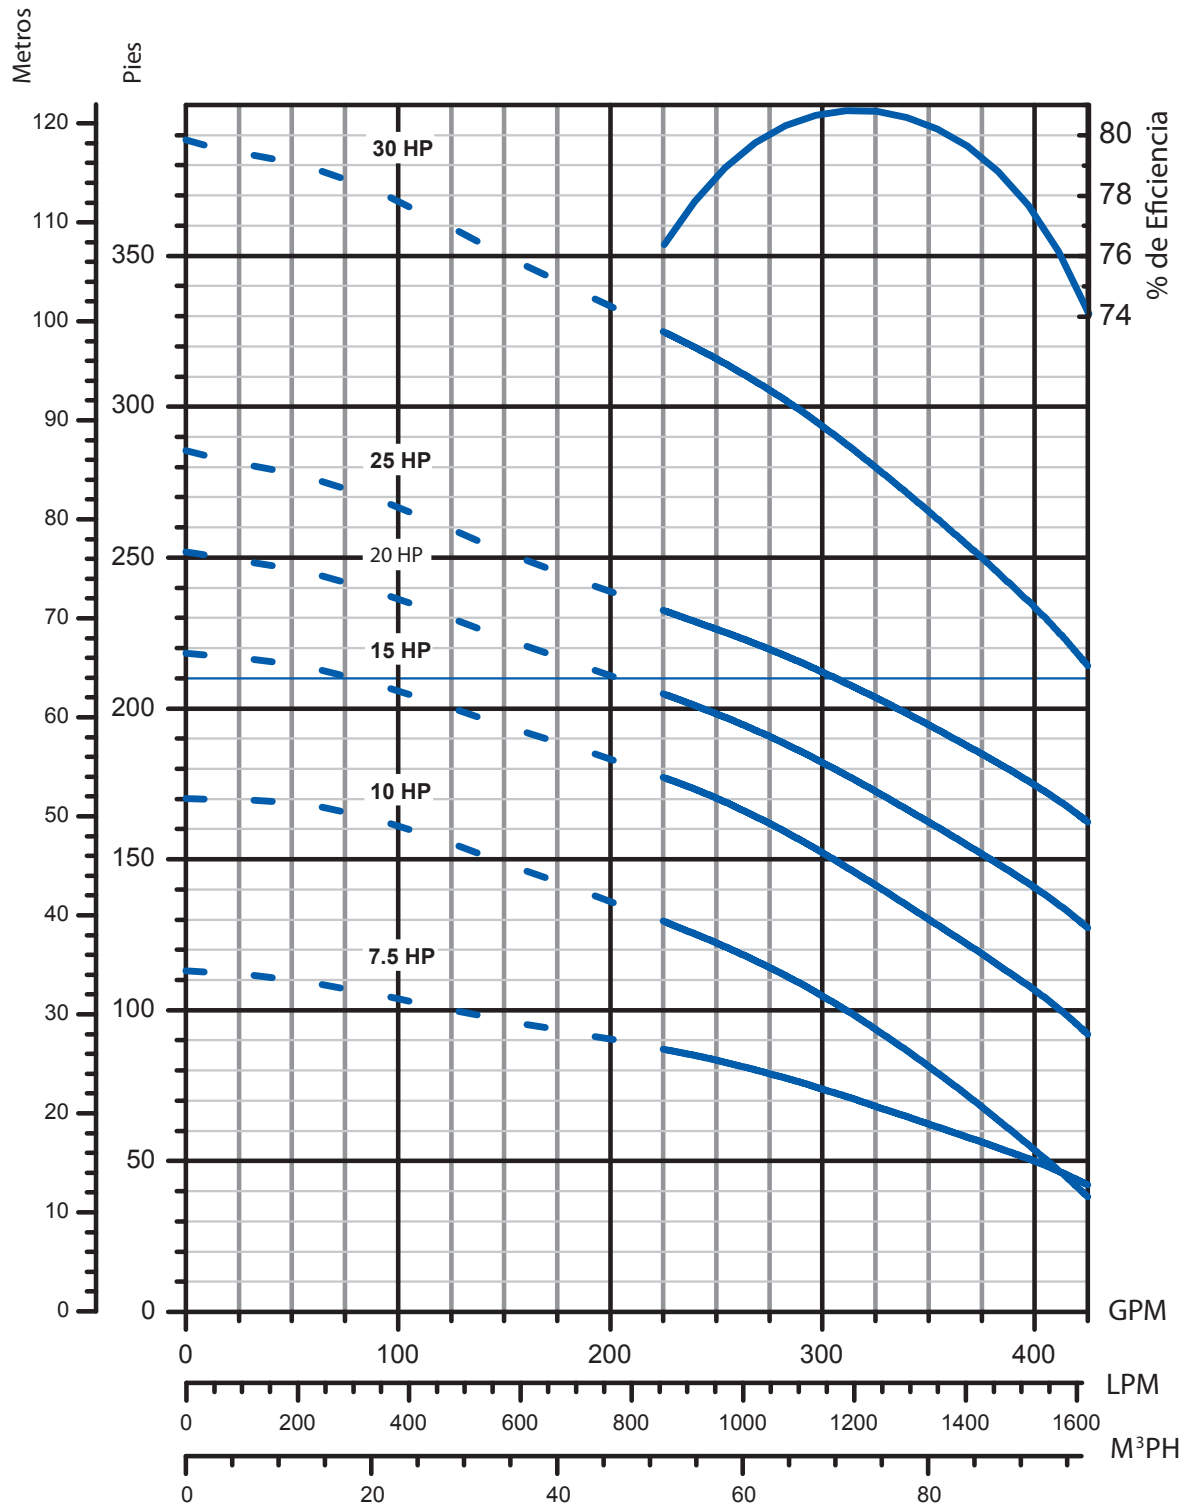

Nota: Rendimiento basado en:
 -Agua dulce, 68 °F (20 °C)
 -Motor de 6" / 3450 rpm

— Rango de operación recomendado


FPS
 STSseries

Rendimiento de Modelo 350STS8

Información sobre Dimensiones

HP	Etapas	Recorte	Tam. de Motor	P	M*	MD*	Peso Motor	Peso Bomba
				Pulg.	Pulg.	Pulg.	Lbs.	Lbs.
40	4	3A 1B	6"	43.8	40.8	5.44	182	184
40	4	3A 1B	8"	45.2	36.4	7.70	274	208
50	5	4A 1B	6"	50.2	55.3	5.44	263	213
50	5	4A 1B	8"	51.6	39.4	7.70	309	238
60	6	5A 1B	6"	56.6	61.3	5.44	291	243
60	6	5A 1B	8"	58.0	42.1	7.70	344	267
75	7	7A	8"	64.3	47.4	7.70	399	297
100	9	9A	8"	77.1	54.9	7.70	481	356
125	11	11A	8"	89.9	68.8	7.70	644	415


Nota: *MD diámetro = Motor Franklin Electric, M = Longitud Máxima de Motor Franklin Electric.

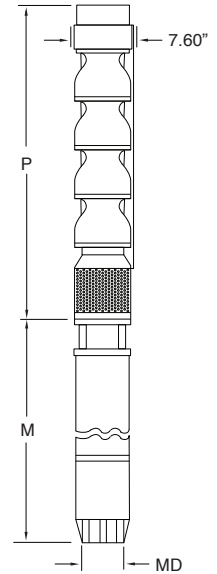

Información para Pedidos

Bomba Turbina Sumergible de 8"								
GPM	HP	Etapas	Tamaño de Recorte	Tam. de Montaje del Motor	Tamaño de Descarga	No. de Orden	No. Modelo	Peso (Lbs)
350	40	4	3A 1B	6"	4" NPT	97080350004	350STS40D8X-0464	208
	40	4	3A 1B	6"	6" NPT	97080350104	350STS40D8X-0466	208
	40	4	3A 1B	8"	4" NPT	97080350804	350STS40D8X-0484	232
	40	4	3A 1B	8"	6" NPT	97080350904	350STS40D8X-0486	232
	50	5	4A 1B	6"	4" NPT	97080350005	350STS50D8X-0564	241
	50	5	4A 1B	6"	6" NPT	97080350105	350STS50D8X-0566	241
	50	5	4A 1B	8"	4" NPT	97080350805	350STS50D8X-0584	266
	50	5	4A 1B	8"	6" NPT	97080350905	350STS50D8X-0586	266
	60	6	5A 1B	6"	4" NPT	97080350006	350STS60D8X-0664	271
	60	6	5A 1B	6"	6" NPT	97080350106	350STS60D8X-0666	271
	60	6	5A 1B	8"	4" NPT	97080350806	350STS60D8X-0684	295
	60	6	5A 1B	8"	6" NPT	97080350906	350STS60D8X-0686	295
	75	7	7A	8"	4" NPT	97080350807	350STS75D8A-0784	328
	75	7	7A	8"	6" NPT	97080350907	350STS75D8A-0786	328
	100	9	9A	8"	4" NPT	97080350809	350STS100D8A-0984	433
	100	9	9A	8"	6" NPT	97080350909	350STS100D8A-0986	433
	125	11	11A	8"	4" NPT	97080350811	350STS125D8A-1184	504
	125	11	11A	8"	6" NPT	97080350911	350STS125D8A-1186	504

Rendimiento de Modelo 350STS8

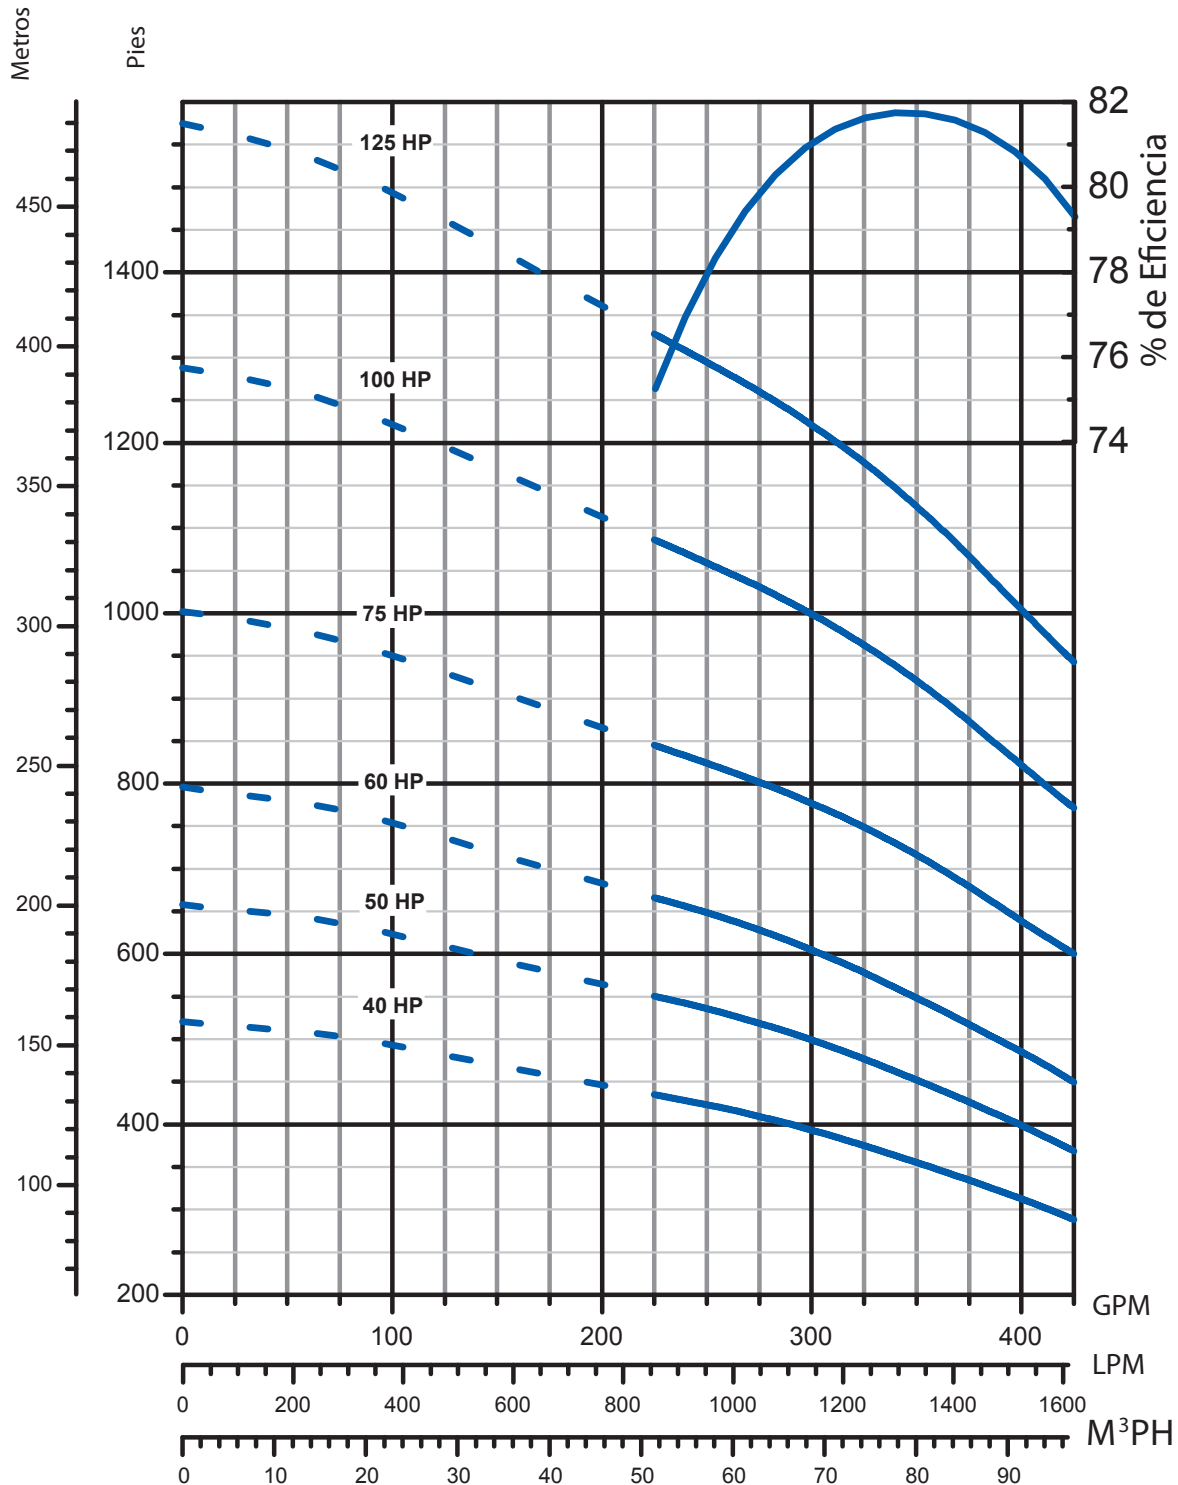

Nota: Rendimiento basado en:
 -Agua dulce, 68 °F (20 °C)
 -Motor de 6" / 3450 rpm
 -Motor de 8" / 3520 rpm

— Rango de operación recomendado