




KX06 Plastic pump (PP Acetal PVDF)

- Various fluid can be dealt with.
- Spring style non——return valve that is of strong self——suction power is easy to install Teflon diaphragm is more durable.
- Easy to control in long distance, able to connect with solenoid valve

Kx06 KX06 series excellent quality reasonable price and handy design

max. working pressure	100psi(0. 7Mpa, 7bar)
max. flow rate	17lpm
max. reciprocating speed	dry running 320cpm Wet running 250cpm
max. suction height (dry sucking)	3m
max. permitted grain	0. 5mm
max. air consumption	9. 0 scfm (0. 252 ³ /min)
air inlet size	1/4in. npt (f) /1/4in. bsp (f)
air outlet size	1/4in. npt (f) /1/4in. bsp (f)
fluid inlet size	1/4in. npt (f) /1/4in. bsp (f)
fluid outlet size	1/4in. npt (f) /1/4in. bsp (f)
weight	Acetal pump 1.1kg

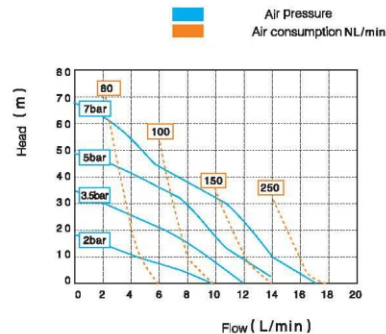

Kx06 DIMENSIONS

