

① Aluminum alloy

② Stainless steel


## KX15 Metal Pump (AL SST)

- Many ports that design is easy to install
- Easy to control in long distance, able to connect with solenoid valve
- Quick to start, strong self-suction power

### Kx15

KX15 series simple structure that is strong and durable

max. working pressure	100psi(0.7Mpa, 7bar)
max. flow rate	50lpm
max reciprocating speed	400cpm
max. suction height(dry sucking)	4m
max. permitted grain	3/32in. (2.5mm)
max. air consumption	28scfm (0.672m <sup>3</sup> /min)
air inlet size	1/4in. npt (f)
air outlet size	3/8in. npt (f)
fluid inlet size	1/2and3/4in. npt (f) or bspt (f)
fluid outlet size	1/2and3/4in. npt (f) or bspt (f)
weight	Aluminum pump 4.4kg Stainless steel pump 6.8kg

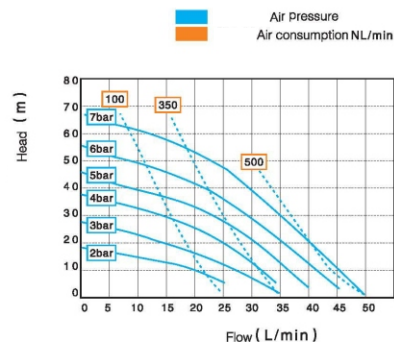

### Kx15

### DIMENSIONS

