

KORAX DIAPHRAGM PUMP




① Stainless steel ② Aluminum alloy

KX40 Metal Pump(AL SST CI)

- Small size & flow rate up to 1 50-5701pm
- Fluid pressure up to 7bar
- Central body, covered by anti-corrosion coat
- Reliable air reversing valve

Kx40 Kx40 series same central body

max. working pressure	100psi(0.7Mpa, 7bar)
max. flow rate	340lpm
max. Reciprocating speed	200cpm
max. suction height (dry sucking)	5m
max. permitted grain	5mm
max. air consumption	125scfm (3.5m ³ /min)
air inlet size	1/2in. npt (f)
air outlet size	1/2in. npt (f)
fluid inlet size	1 1/2in. npt (f)
fluid outlet size	1 1/2in. npt (f)
weight	Stainless steel pump 29.0kg Aluminum pump 16.0kg

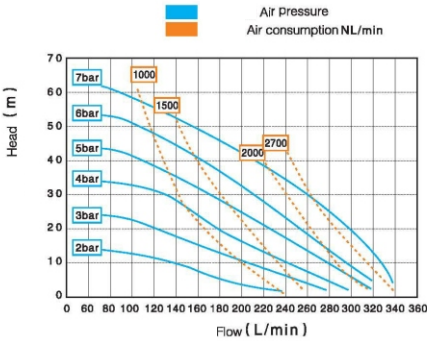

Kx40 DIMENSIONS

