GRINDER PUMPS



GP-A SERIES - 2 HP

APPLICATIONS

Ideal for residential sewage waste transfer where high head conditions exist

FEATURES

- Powerful 2 hp single-phase, 3450 rpm with capacitor start/run motor with built-in overload protection to prevent over-current and over-temperature damage
- High starting torque motor to handle the demands of grinding domestic sewage
- Start/Run components encased in oil-free chamber unique for easy access requires no control panel
- Epoxy-coated cast iron finish for corrosion resistance and durability
- Mechanical seal: carbon/ceramic
- Deflection-resistant, short motor shaft
- Corrosion-resistant brass impeller
- Seven-vane, angled face, non-clogging impeller
- Tight cutting clearances for superior cutting action, grinding 414,000 cuts per minute
- Optional mechanical float switch for automatic operation
- Automatic operation with leg kit and tether at 9":
 - "On" 23" 25"
 - "Off" 9" 11"
- GLK Grinder Leg Kit included

(U.S. Patent No. 7,237,736)

SERIES SPECIFICATIONS


Item No.	Model	НР	Volts	Hz	Phase	Full Load		Switch Type/	Performance (GPM @ Height in Feet)					Shut-Off	PSI	Cord	Weight	
						Amps	Watts	Operation	20'	40'	60′	80′	100′	120′	(ft)			
520861	GP-A231-20	2	208-230	60	1	13.9	3200	Mechanical Float	32	31	30	25	20	10	130	56	20' 6.1 m	101 lbs 45.8 Kg
*520863	GP-A231-30	2	208-230	60	1	13.9	3200	-	32	31	30	25	20	10	130	56	30′ 9.1 m	104 lbs 47.2 Kg

*No float


GRINDER PUMPS

GP-A SERIES - 2 HP

ENGINEERING DATA

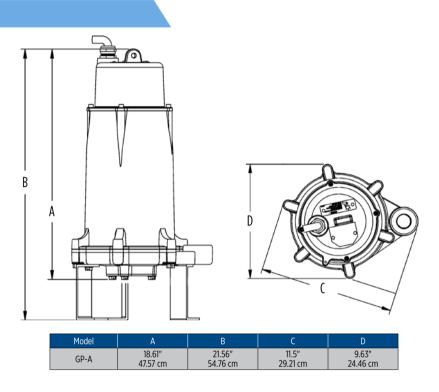

PERFORMANCE DATA

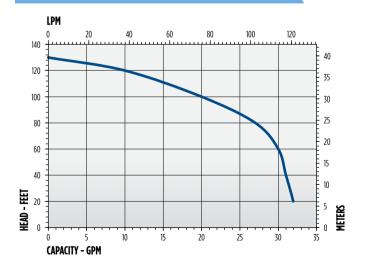

CONSTRUCTION

Motor Cover	Cast iron with epoxy coating						
Motor Cover O-Ring	Nitrile						
Motor Design	Single-phase, capacitor start, capacitor run						
Insulation Class	F						
Overload Protection	Internal, on winding thermal protector						
Motor Shaft	AISI 300 Series stainless steel						
Ball Bearing - Upper	Single row ball, 6203						
Ball Bearing - Lower	Single row ball, 6306						
Seal Housing	Cast iron with epoxy coating						
Mechanical Seal	Carbon/ceramic						
Volute	Cast iron with epoxy coating						
Impeller	Brass						
Rotating Cutter	2 blade design, AISI 440C stainless steel, through-hardened to Rockwell 55-60C						
Stationary Cutter	AISI 440C stainless steel, hardened to Rockwell 55-60C						
External Hardware	300 Series stainless steel						
Power Cable	Type SOW or SOW 14/3 AWG						